

# IP66 AHD 5MP MVT-AH21S



## FEATURES

- \* 5.0MP 1 / 2.5" CMOS
- \* FH8538M
- \* 5.0mp
- \* 4-in-1 AHD / TVI / CVI / CVBS
- \* AE / AWB / AES / AGC
- \* ICR
- \* 75-300m
- \* OSD
- \* UTC / DVR / OSD

IP66



## SPECS

Model	MVT-AH21S
Resolution	1 / 2.5" CMOS 5MP
Standard	PAL / NTCS
Interface	AHD / CVI / TVI / 960H
Lens	2.8-12mm
Light Source	42pcs x Φ5 LED 35 IR
Light Sensitivity	0.05LUX / F1.2 B / W 0.01LUX / F1.2
Shutter	1/25 30 1 / 50,000S
Frame Rate	5MP @ 25fps
S / N	62dB
Compression	BLC
OSD	Menu
AWB	Auto / Manual
IR Cut	Auto / ICR / Color / B / W
IR Distance	75-300m
Power	DC 12V ± 10%
Operating Temp	-30°C + 60°C / 95% RH
Protection	IP66
Weight	2g
Power Consumption	4W



## PRODUCT PICTURE

▼ Two colors optional

M'TEAM



▼ 3-Axis Bracket

M'TEAM



▼ Size

M'TEAM



Unit:mm

- Q1 如何選擇合適的電源線
- 如何選擇合適的DVR 如何選擇合適的DVR 如何選擇合適的DVR
- Q2 如何選擇合適的電源線
- 如何選擇合適的電源線 如何選擇合適的電源線 1pc
- Q3 如何選擇合適的電源線
- 如何選擇合適的OEM 如何選擇合適的OEM
- Q4 如何選擇合適的電源線
- 如何選擇合適的AHD 如何選擇合適的12V DC 如何選擇合適的12V DC




\* Power supply's amperage cannot be less than CCTV camera's amperage.



## VOTAGE DROP

\* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

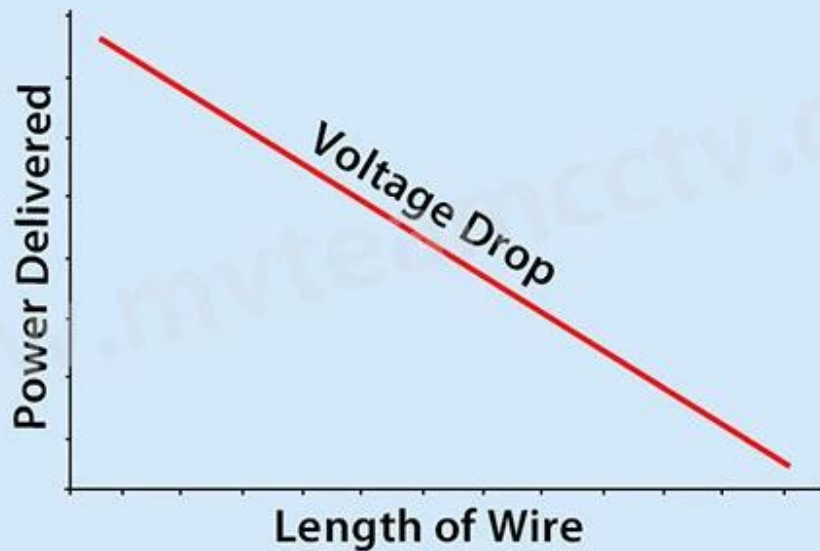

## Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

