

5MP CCTV MVT-AH17S



FEATURES

- * 5.0MP 1 / 2.5"0521 CMOS
- * FH8538M
- * 5.0mp
- * 4-in-1 AHD / TVI / CVI / CVBS
- * AE / AWB / AES / AGC
- * ICR
- * 75-300M
- * OSD
- *
- * UTC / DVR / OSD



SPECS

Model	MVT-AH17S
Resolution	1 / 2.5" CMOS 0521 + 8538M 5.0MP
Standard	PAL / NTCS
Formats	AHD / CVI / TVI / 960H
Lens	6mm M12
IR LEDs	36pcs x 5mm LED 30 IR
Sensitivity	0.05LUX / F1.2 B / W 0.01LUX / F1.2
Shutter	1/25 ~ 30 1 / 50,000S
Frame Rate	5MP @ 25fps
S/N Ratio	62dB
Compression	BLC
OSD	
AWB	Auto / Off / On
IR Cut	Auto / ICR / Color / B / W
Range	75-300M 500m
Power	DC 12V ± 10%
Operating Temp	-30°C ~ + 60°C / 95% RH
Protection	IP66
Mounting	2
Power Consumption	4W

▼ Pictures

M'TEAM



▼ 3-Axis Bracket

M'TEAM



▼ Size

M'TEAM



Unit:mm

- Q1 如何選擇合適的電源線
- 如何選擇合適的DVR如何選擇合適的DVR如何選擇合適的DVR
- Q2 如何選擇合適的電源線
- 如何選擇合適的電源線如何選擇合適的1pc
- Q3 如何選擇合適的電源線
- 如何選擇合適的OEM
- Q4 如何選擇合適的電源線
- 如何選擇合適的AHD如何選擇合適的12V DC如何選擇合適的




* Power supply's amperage cannot be less than CCTV camera's amperage.



VOTAGE DROP

* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

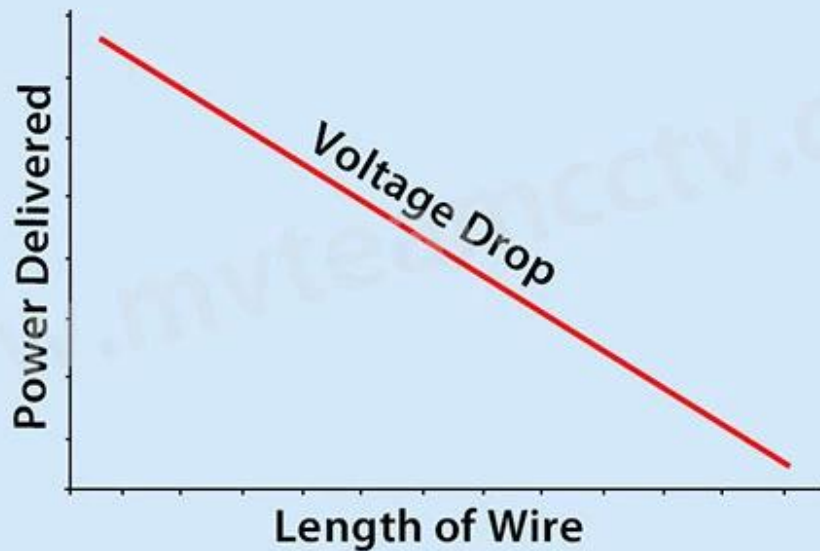

Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

