

- 1 OSD menu
- 2 0.1°/220°/0.1°/180°/s
- 3 1280x720/1080p
- 4 1280x720/1080p/720p/480p

- 5 360° 90° 0.4°/320°
- 6 4 180°
- 7 4 LIMITE
- 8
- 9
- 10 RS485
- 11 PELCO-D PELCO-P
- 12 IP66
- 13 TVS4000V


SPECS



GENERAL	
Resolution	0.1° 300°C/ s
Resolution	0.1° 220°/
Resolution	220°/
Resolution	360° 0° 90°
Resolution	
Resolution	128
Resolution	90° 180°
Resolution	355° 4
Resolution	
Resolution	BNC
Remote	RS485
Resolution RS485	2400/4800/9600/19200 BPS
ID	1 254
Resolution	-10°C +60°C
Resolution	0 95
Resolution	IP66
Resolution	AC 24V ±4V
Resolution	10W
Resolution	-10°C +60°C
Resolution	2.9
IMAGES	
CMOS	1/3" CMOS
Resolution	1305H x 1049V 1.37M
Resolution	X20 F = 4.7 84.6.0
Resolution	APPR 55.2° 3.2°
Resolution	
Resolution	0.5 BW 0.1LUX
S / N Y	52
Resolution	
ICR	

DNR	□□ / □□ / □ / □□ / □
HLC	□□ / □
□□	□□ / □
□□□ □□	□□
IRIS	□□
FLIP	□□ □ □□ □□□□□□ OFF □□

● FACTORY & OFFICE

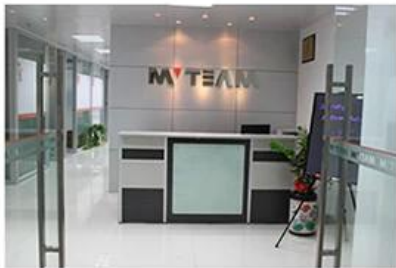

● EXHIBITIONS



□□□□□□ AHD □□□□□□ □□□□