

Outdoor Bullet AHD TVI CVI CVBS 4 IN 1 Hybrid Camera AHD CCTV 5MP MVT-AH14S



● FEATURES

- * 5.0MP 1/2.5" 0521 Progressive scanning Image CMOS sensor, capture the moving images without jagged
- * High-performance Fuhan FH8538M processor
- * Support coaxial HD output, clear and exquisite image, resolution reach to 5.0mp
- * 4-in-1, AHD, TVI, CVI, CVBS output
- * Support AE, AWB, AES, AGC
- * With IR Cut, Support ICR switch, Realizing day and night monitoring control
- * 75-3 general support under the coaxial cable transmission distance without loss of over 500M
- * Support OSD control, suitable for custom setting
- * High-speed, long distance, real-time transmission
- * Support UTC control, realize adjusting and setting OSD parameter from DVR by UTC function

Applications:

Finance, supermarkets, telecommunications, government, schools, airports, factories, hotels, museums and other places to apply the high-resolution requirements.



● SPECS

Model	MVT-AH14S
Sensor	1/2.5" CMOS(0521+8538M) 5.0MP
SIGNAL	PAL / NTCS
Video Output	AHD/CVI/TVI/960H
Lens	6mm(M12) Lens
IR Distance	2pcs led array, 30m IR Distance
Min. Illumination	Color:0.05Lux/F1.2,B/W:0.01Lux/F1.2
Electronic Shutter	1/25(30)S to 1/50,000S
Synchronization	Internal
Frame rate (fps)	5MP @25fps
S/N Ratio	62dB
Sync Mode	BLC
OSD	optional
AWB	Automatic / manual / day / night
Day/Night	with IR Cut, Auto(ICR) / Color / B/W
Transmission Distance	Over 500m via 75-3 coaxial cable
Power Supply	DC 12V±10%
Working Environment	-30°C~+60°C/Less than 95%RH(no condensation)
Waterproof	IP66 with certificate
Warranty	2 years
Power	4W MAX

Picture

▼ Side View

M'TEAM



▼ Front View

M'TEAM



▼ Back View

M'TEAM



▼ Cables

M'TEAM



Q1:Can I view the camera on mobile phone and computer?

After connect the camera to DVR, you can view the camera thru DVRs' network view function.

Q2:Can I test sample before place mass order?

Sure,sample order is welcomed, MOQ is 1pc.

Q3:Can I buy the cameras with my own brand?

Yes,we accept OEM order.

Q4:How to supply proper voltage and amperage for the cameras?

Our AHD cameras are 12V DC, please refer to below guide:




* Power supply's amperage cannot be less than CCTV camera's amperage.



VOTAGE DROP

* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

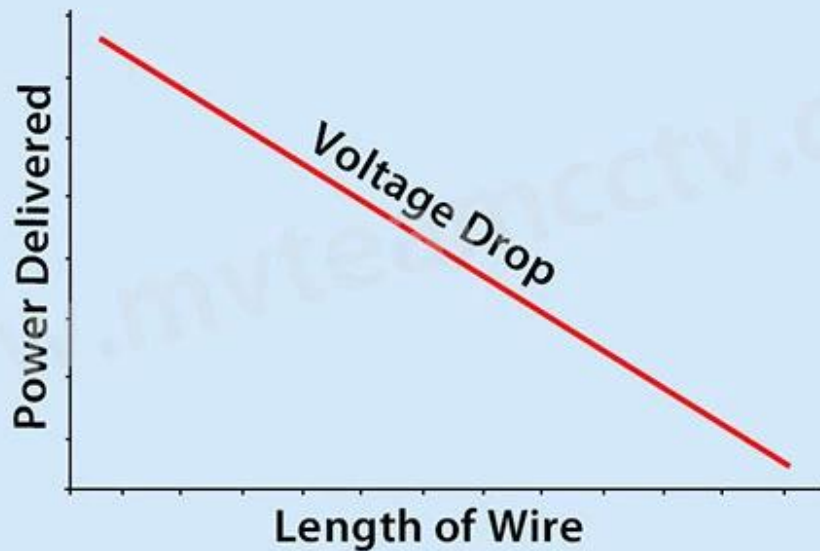

Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

▼ Packages

M'TEAM

Brand Camera Package



Neutral Camera Package



Brand DVR Package



Package: MVTEAM Brand Box Or Netural Box Or Specified by customer.

▼ Shipping

M'TEAM



Shipping: Based on the your demands to choose the best shipping way.

Contact us:

If you have any question, welcome to [Contact us](#).

Your close attention to our company is highly appreciated.

Welcome to visit our official website www.mvteamcctv.com to view video demos,download product catalog and read CCTV technical articles