

# HD Bullet CCTV AHD TVI CVI CVBS 5MP AHD MVT-AH12S



## FEATURES

- \* 5.0MP 1 / 2.5 "0521 CMOS
- \* Fuhun FH8538M
- \* HD 5.0mp
- \* 4-in-1 AHD TVI CVI CVBS
- \* AE AWB AES AGC
- IR
- 500M \* 75-3
- \* OSD
- \* UTC DVR OSD

### DESCRIPTION



## SPECS

Model	MVT-AH12S
Resolution	1 / 2.5" CMOS 0521 + 8538M 5.0MP
Standard	PAL / NTCS
Interface	AHD / CVI / TVI / 960H
Lens	6mm M12
IR	36 x 5 IR LED 30m IR
Min Illumination	0.05Lux / F1.2 B / W 0.01Lux / F1.2
Shutter	1/25 30 S ~ 1 / 50,000 S
Frame Rate	5MP @ 25fps
S / N	62dB
Compression	BLC
OSD	
AWB	
IR / Lens	IR / CR / B / W
IR Distance	75-3 500m
Power	DC 12V ± 10%
Operating Temp	-30°C + 60°C / 95% RH
Protection	IP66
Mounting	2
Power Consumption	4W MAX



## PRODUCT PICTURE

Adopt infrared antireflection panel design, make the camera with better night vision.



Quality reflective overlay, surface-emitting technology, can magnify the effect of focus, improve product performance and reliability.



HD 2MP 3.6mm/6mm lens(M12 Mount),bring more clear image.



Adjustable Bracket



Size



IP66 Waterproof Grade,give you more reliable protection

IP66



Q1 如何選擇合適的電源供應器？

如何選擇合適的DVR？如何選擇合適的DVR？

Q2 如何選擇合適的電源供應器？

如何選擇合適的MOQ？1pc

Q3 如何選擇合適的電源供應器？

如何選擇合適的OEM

Q4 如何選擇合適的電源供應器？

如何選擇合適的AHD 12V DC




\* Power supply's amperage cannot be less than CCTV camera's amperage.



## VOTAGE DROP

\* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

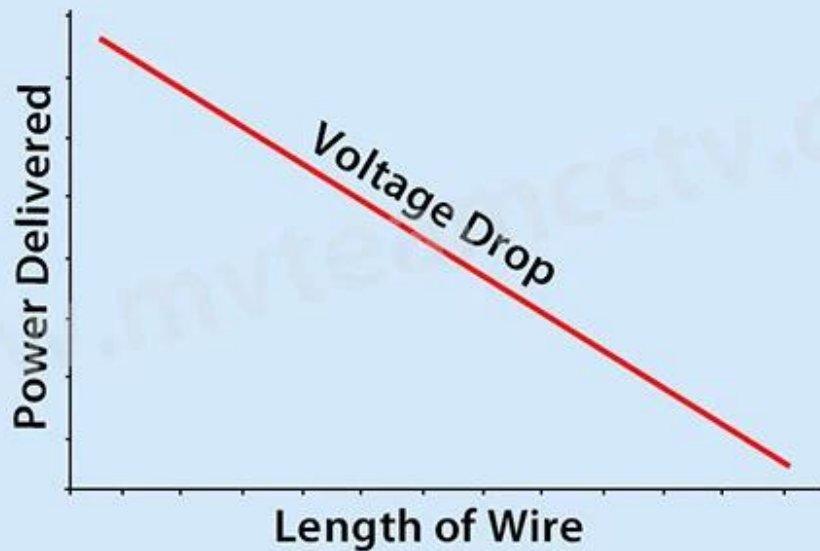

## Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

## ▼ Packages

M'TEAM

Brand Camera Package



Neutral Camera Package



Brand DVR Package



www.mvteamcctv.com MVTEAM Neutral

## ▼ Shipping

M'TEAM



www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com [www.mvteamcctv.com](http://www.mvteamcctv.com) CCTV