

## Macchina fotografica H100-E della lampadina di Wifi dell'interno VR della macchina fotografica del CCTV nascosta di 360 gradi

### ● FEATURES

M'TEAM

- \* Adottare il sensore di immagine CMOS, con risoluzione 1.3MP, 2MP, 3MP per la propria opzione
- \* Angolo di visione ampio 360 gradi, nessuna area cieca, applicabile a diversi scenari, supportando 4 diverse modalità di visualizzazione
- \* Supporto audio bidirezionale, prompt vocale.
- \* Commutazione automatica del filtro a infrarossi ICR, realizza il monitoraggio giorno e notte
- \* Supporta la chiara risoluzione HD standard da guardare, per adattarsi alla varietà dell'ambiente di rete
- \* Supporta il monitoraggio in tempo reale dei telefoni cellulari
- \* Supporto del controllo PTZ, acquisizione remota, registrazione audio e video
- \* Copertura della rete globale, sempre e ovunque
- \* Supporto APP mobile N\_eye 3C

# Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.



## Multi-Angle Monitor


Support multi-scene modes



**E PTZ**



**SPLIT SCREENS**

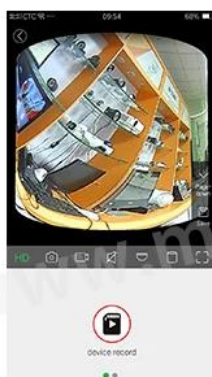

**ROLLER**



**CORRIDER**

# Video footage storage

Support max 128GB micro TF card for recording.



—▶ 8:30 —▶ 14:30 —▶ 20:08 —


Note: Memory cards not included in the package  
please purchase separately



# Intergrated with LED illumination



# | Show Appearance |

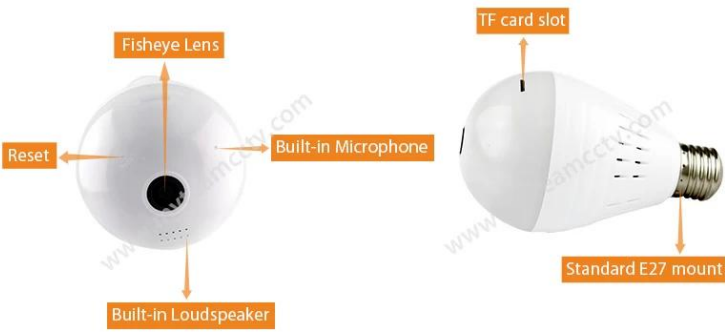

# Mobile Phone View



Download the App



Scan QR code to download the APP or  
Search Neye3C in APP Store/Android Market



Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc. (through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps, 11g :54Mbps, 11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

▼ Shipping
M'TEAM






Spedizione: In base alle tue richieste di scegliere il miglior modo di spedizione.

### Contattaci:

Se hai qualche domanda, benvenuto [Contattaci](#).

La tua attenzione alla nostra azienda è molto apprezzata.  
Benvenuto da visitare il nostro sito ufficiale [www.mvteamcctv.com](http://www.mvteamcctv.com)

**Articoli correlati sulla telecamera IP Wifi:**

[Come impostare Motion Detection per la telecamera IP Wifi?](#)

[Per quanto tempo i record video possono salvare una scheda TF per le telecamere Wifi?](#)

[Come visualizzare in remoto MVTEAM Wifi IP Camera sul computer?](#)