10□□□□□□□□□□□□LAN□□□□□□□MVT-K08□□8CH□□IP□□□□□□

□□□□□□□

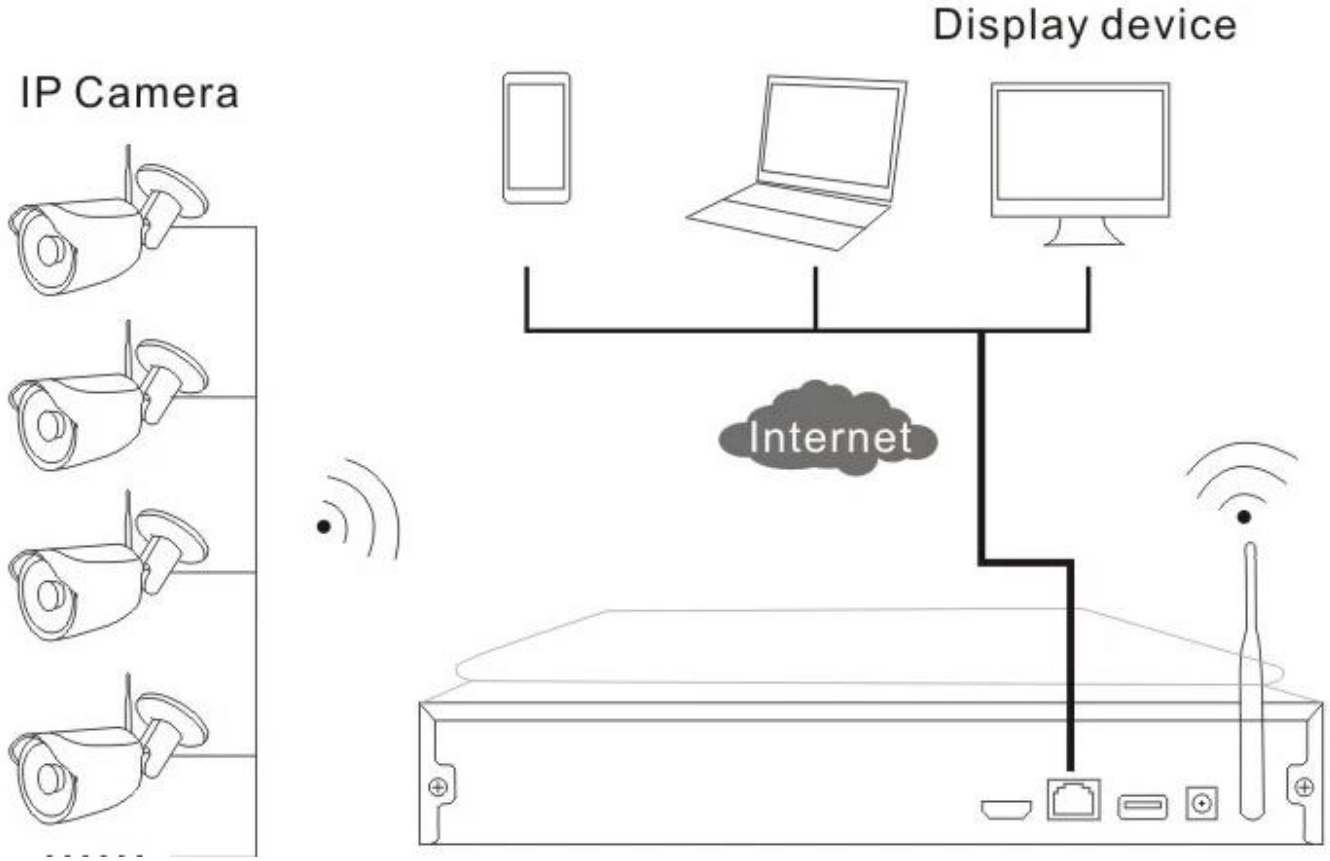

□□□□□□□□□NVR□□□□□□□□□□

□□□□10 "□□□□□□□□□□□LAN□□□□□□□1□□8ch□□□□□□HD□NVR
8□□□HD□□□□□IP□□□
8□12V□DC□/ 2A□□□□□□
1□□□□□□□□□□□□□□□□□□□□□□□□□□
1□□CD□□CMS□□□□□□□□□□□□□□□□□□

□□□□□□

1-8CH□□□□□NVR

FEATURES

*□□□10 "□□□HD□□□□□□□□□1280 * 1024□□330□□□□□□□□□□□
*□□□□□□□□□□□□□WI-FI□□□□□□□□
□□□□□802.11b / g / n□□□□□□□150Mbps□□
* HDMI□□□
*□□□□□□8 * 720P; 8 *□960P□□□□8 * 960H□4 * 720P□ 8 *□960P

* 3□□USB□□□□□□□□□□□□□HDD 4TB□□□□□□□□□□□P2P□□□□×1

SPECS

□□ NVR □□		
□□□□□□□□ □□□□	□□□□ □□□□□ OS	
AV□□□□□□□/□□□□□□□	□□□□□□ □□□	8CH
	□□□□□□ □□□ □□ broadbank	20Mbps□
AV □□□□□□□/□□□□ □□	HDMI □□	1CH□□□□□1024x768,1366x768□ 1440x900,1920x1080p
AV CODEC □□	□□□ □□	D1 / 720P
	□□□□	8CH
□□□ □□	□□□/□□□□□ □□□	Maual□□□□□□□□□□
	□□ □□□	□□□ □□□□□□□□□□□□□
	□□□□□□	USB □□□□□□
□□□ □□□□	□□□	1 * SATA □□□□□□□
	□□□□ □□	4 TB □ □□ □□□ □
□□ □□□□□□□	□□□□□□ □□□□□□□	1 □□□ RJ45 10M / 100M□ 2 WI-FI □□□□□□□
	USB □□□□□□□	3 USB 2.0
□□□□□□ □□	□□□□□	UPnP□ □□□□&□038;□□□□□SMTP □E□□ □ service□□PPPoE□ □□□□□□□□□□ DHCP □□□□□ □□□□□ AN IP □□□□ □...
□□	□	DC12V3A
	□ □□ □W□	≤5W□□□ HDD□
	□□ □□ □°C□	-10℃□+ 55℃
	□□□□□ □□ □□□ RH	10□□90□
	□□□	257□□□□□□□W□×210□□□□□□□V□×45 □□□□□□□H□
	□□□□□□□ HDD□	≤1Kg

PRODUCT PICTURE

www.mvteamcctv.com

MVTEAM□□□□□NVR□□□□□

□□□□□□□□□□□□□□□□□□□□□□NVR□□□□□□□□□MVTEAM□

2-720P□□□□□□□IP□□□

● FEATURES

MVTEAM

* 1.0M / 720P□□□□□IPC
* IR□□□□
* 3.6□□□□□□□□□
* 3pcs□□3□□LED□□□□30□□□□IR□□
*□□IP66

● SPECS

MVTEAM

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Defination
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10℃ to +50℃ / 30% to 80% RH
Storage Temperature/Humidity	-20℃ to +60℃ / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

PRODUCT PICTURE

□□IP□□□□3-12V□DC□/ 2A□□□□□□

AC ADAPTER
MODEL:XY-SW24W
INPUT: 100-240V 50/60 Hz
OUTPUT: DC12V 2.0A

4-CD□□□□□□□□□□□□□□□□□□□

Wireless kit
Quick installation guide

5-□□□□□

4ch
Video Record
Surveillance System
·Friendly GUI
·Cloud Technology
·Smart Design
·Smart Phone Viewing
·HD LCD Screen
HOME SECURITY SOLUTIONS

□□□□NVR□□□

4CH Wireless NVR Kit
www.mvteamcctv.com
MVTEAM

4CH Wireless NVR Kit
www.mvteamcctv.com
MVTEAM

8CH Wireless NVR Kit
www.mvteamcctv.com
MVTEAM

FACTORY & OFFICE

EXHIBITIONS