

● FEATURES



● Features

- 1.3M CMOS sensor
- HD/HD-CVBS output
- 3 LED IR 15W Vandalproof • 3
- 360° Panor5MP 1.5M12
- 75 3 500M
- OSD
- ICR
- LED


● Specifications

Specifications

● SPECS



Model	MVT-AH60T	MVT-AH60B
Sensor	1/3" CMOS pixel plus 1.3M/ 1024P AR0130	1/3" CMOS pixel plus 1.3M/ 1024P SONY225
SIGNAL	PAL / NTCS	
Video Output	HD-AHD/CVBS	
Effective Pixels	1280(H)*1024(V)	1280(H)*1024(V)
Min. Illumination	0.01Lux F1.2	
Shutter	4/25s~1/45,000s	
Synchronization	Internal	
Video Output	1-channel BNC HDAHD/CVBS high definition video output	
BLC	optional	
OSD	optional	
AWB	Automatic / manual / day / night	
Day/Night	Auto(ICR) / Color / B/W	
Transmission Distance	Over 500m via 75-3 coaxial cable	
Power Supply	DC 12V±10%	
Working Environment	30°C~+60°C/Less than 95%RH(no condensation)	
Power Consumption	4W MAX	

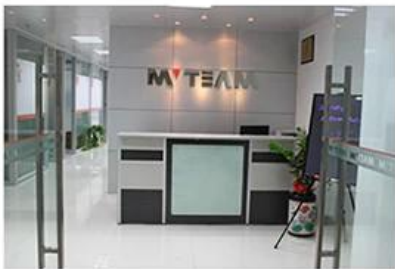

● EXHIBITIONS



□□□□□□ AHD □□□□□□□□□□ □□□□□□