



4 Channel NVR CE ROHS FCC MVT-K04



IP Camera

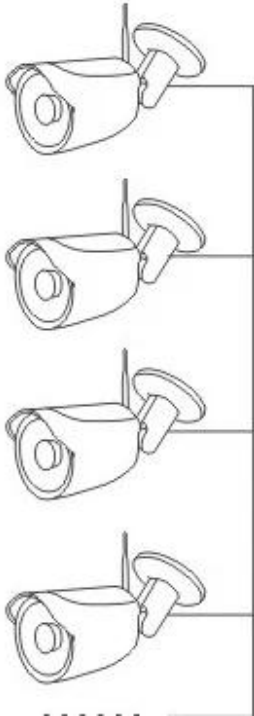

Display device

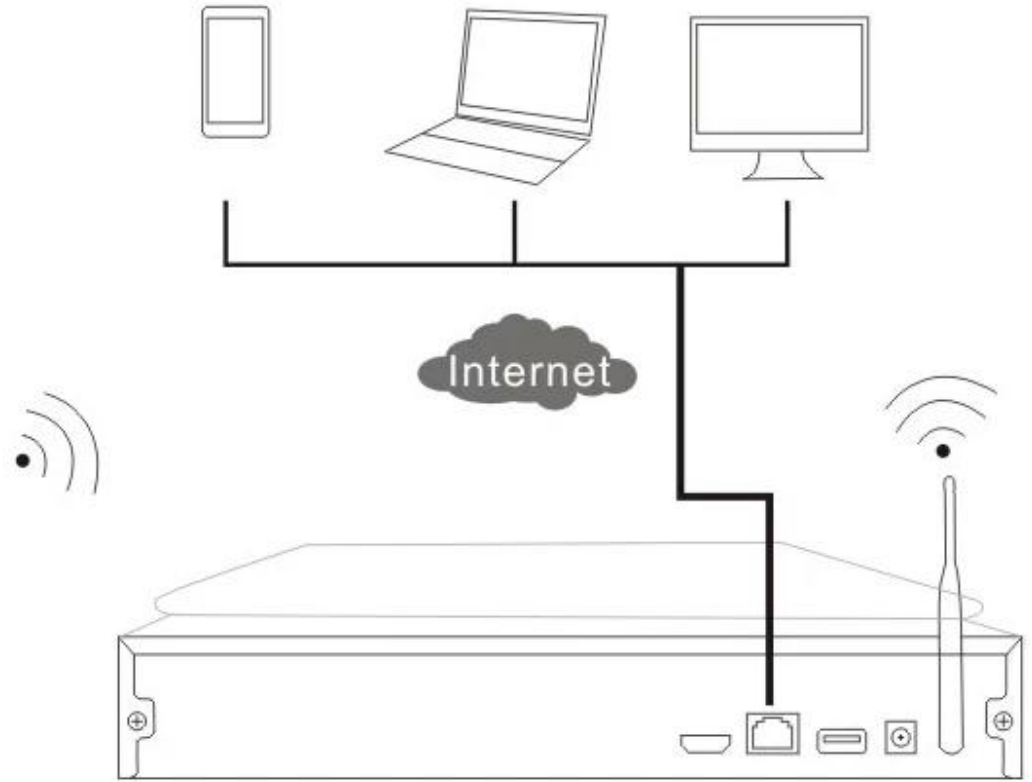

4 Channel NVR

- 1 x 4 Channel NVR with 7" LCD and WiFi
- 4 Channel
- 4 x 12V DC / 2A
- 1 x HDMI
- 1 x CD-ROM CMS



1-4CH NVR

● FEATURES



- * 10" LCD with 1280 * 1024 resolution and 330° rotation
- * Wi-Fi with 802.11b / g / n up to 150Mbps
- * HDMI
- * 4 * 720P; 4 * 960P; 4 * 960H; 4 * 720P;

* 3 USB 4TB P2P X1

SPECS



NVR		
	Linux	
AV		4
	broadbank	20Mbps
AV	HDMI	1024x768, 1366x768, 1440x900, 1920x1080p
AV		D1 / 720P
		4
		Maual
		USB
		1 * SATA
		4 TB
		1 RJ45 10M / 100M 2
	USB	3 USB 2.0
		SMTP survice PPPoE DHCP IP ...
		DC12V3A
		≤5W HDD
		-10°C + 55°C
		10° RH
		257x210x45mm HDD ≤1Kg

MVTEAM NVR



□□□□□□MVTEAM□□NVR□□□□□□



2-720P□□□□□□□□

● FEATURES

MVTEAM

- * 1.0M / 720P□□IPC
- * IR CUT
- * 3.6mm□□
- * 3□□□LED□□□30M□□□□
- * □□□□IP66

● SPECS

MVTEAM

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

● **PRODUCT PICTURE**



3-12VDC / 2A



4-CD□□□□□□□□□□



5□



□□□□NVR□□

4CH Wireless NVR Kit
www.mvteamcctv.com

M' TEAM CE FC

4CH Wireless NVR Kit
www.mvteamcctv.com

M' TEAM CE FC

8CH Wireless NVR Kit
www.mvteamcctv.com

M' TEAM CE FC

● FACTORY & OFFICE

M TEAM



● EXHIBITIONS

M TEAM

