

720P@1 / 2.8" SONY CMOS 18mm 4.7-87.6mm WIDE-TELE

1 7.0" IR 120

Max.25 / 30fps @ 1080p

2 TI 368 H.264; MJPEG

3 DWDR / ICR DNR 2D&; 3D BLC

4 CMS

5 300° / s 0° 360° 0° 90°

6 128; 4

7 ;

8 -10°C + 50°C

9

IP

360° 90°	
0.1° 220° / 0.1° 180° / s	
IR 100	
128	
4	
PTZ	
TVS	
SPEC	
OS	LINUX RTOS 32 DSP TI DM368
RAM	32M 128M DDR2

規格	H.264 可變碼率0.1M-6Mbps
幀率	2.0 幀/秒@ 25fps可變碼率1-25 FPS;
解析度	1920×1080,1280×720; 640×360480×270352×288320×240352×192320×192288×192256×192;
IO	IO IP
功能	RTSP / FTP / PPPOE / DHCP / DDNS / NTP / UPnP
	WEB OSD
	UC2 VM6000 SDK
SPEC	
鏡頭	1/3" SONY 720 CMOS
解析度	720P
視角	
水平/垂直	58.16°-2.9°
像素	4.7 94
像素	18
照度	0.02LUX
增益	
增益	
IRC	* /
增益	1.0 0.01
噪聲	DSP-8
增益	* / R B UP DOWN
IRC	* /
規格	
網路	10Base-T / 100BASE-TX RJ45
解析度	720P
幀率	25/30 fps
編碼	H.264 / MJPEG
增益	
ONVIF	ONVIF 2.4
協議	TCP / IP.HTTP.DHCP.PPPoE.Udp.RTP / RTCP.DNS.DDNS .UPnP.SMTP
水平/垂直	0.2° 200°/
水平/垂直	0.2° 100°/ s
視角	200° / S
旋轉	360° 0° 90°
解析度	128
視角	90° 180°
旋轉	355° 4
旋轉	4
增益	
增益	
增益	
OSD	
增益	
溫度	-20°C + 60°C
解析度	95
解析度	IP66
電壓	AC24V / 40W IR
尺寸	6.5


● PRODUCT PICTURE

M' TEAM



● FACTORY & OFFICE

M' TEAM

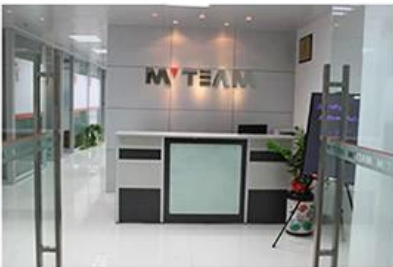

● EXHIBITIONS

