

5MP AHD TVI CVI CVBS MVT-AH12S



FEATURES

- * 5.0MP 1 / 2.5" CMOS
- * FH8538M
- * 5.0mp
- * 4-in-1 AHD TVI CVI CVBS
- * AE AWB AES AGC
- * ICR
- * 75-300m 500M
- * OSD
- *
- * UTC DVR OSD



SPECS

Model	MVT-AH12S
Resolution	1 / 2.5" CMOS 5MP
Standard	PAL / NTCS
Protocol	AHD / CVI / TVI / 960H
Lens	6mm M12
IR LEDs	36pcs x 5mm LED 30 IR
Min. Light	0.05LUX / F1.2 B / W 0.01LUX / F1.2
Shutter	1/25 30 1 / 50,000S
Frame Rate	5MP @ 25fps
S/N	62dB
Compression	BLC
OSD	
AWB	
IR Cut	Auto ICR / Color / B / W
Range	75-300m 500m
Power	DC 12V ± 10%
Temp. Range	-30°C + 60°C / 95% RH
Protection	IP66
Mounting	2
Weight	4W



PRODUCT PICTURE

Adopt infrared antireflection panel design, make the camera with better night vision.



Quality reflective overlay, surface-emitting technology, can magnify the effect of focus, improve product performance and reliability.



HD 2MP 3.6mm/6mm lens(M12 Mount),bring more clear image.



Adjustable Bracket



Size



IP66 Waterproof Grade,give you more reliable protection

IP66



Q1 如何選擇合適的電源供應器

如何選擇合適的DVR如何選擇合適的DVR如何選擇合適的DVR

Q2 如何選擇合適的電源供應器

如何選擇合適的電源供應器如何選擇合適的1pc

Q3 如何選擇合適的電源供應器

如何選擇合適的OEM

Q4 如何選擇合適的電源供應器

如何選擇合適的AHD如何選擇合適的12V DC




* Power supply's amperage cannot be less than CCTV camera's amperage.



VOTAGE DROP

* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

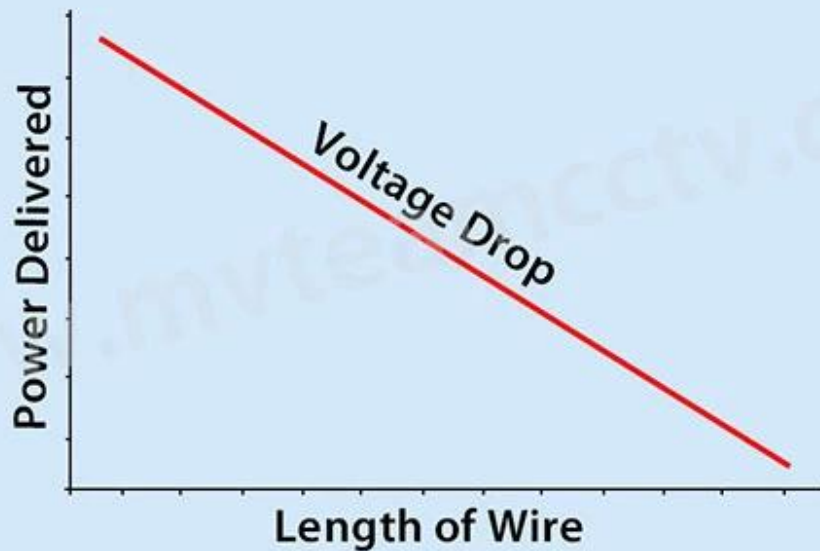

Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

