□□□□ □□□□□□□ 30 □□□ AHD □□ Camera(MVT-AH12)

● FEATURES

M'TEAM

Adopt infrared antireflection panel design, make the camera with better night vision.

Quality reflective overlay, surface-emitting technology, can magnify the effect of focus, improve product performance and reliability.

www.mvteamcctv.com

HD 2MP 3.6mm/6mm lens(M12 Mount),bring more clear image.

Adjustable Bracket

Size

SPECS

1-1.0M / 1.3 M / 2.0 m / 3 M □□□□□□□□ □□□ 3MP(2048*1536)
2-2MP 3.6 □□□ 6 □□□□ lens(M12)
3 □□□□□ IP66
4-75-3 □□□□□□□□□□□□□□□□□ 500 □□□□
5 □□□ □□□ □□□□
6 □□ OSD

□□	MVT AH12A	MVT AH12T	MVT AH12B	MVT AH12R	MVT AH12P	MVT AH12F
□□□	1/4" CMOS (OV9732 + NVP2433□ 1.0MP□□ □□ □	1/3" CMOS (AR0130 + NVP2433) 1.3MP□□ □□ □	1/3" CMOS (SONY225 + NVP2431H□ 1.3MP□□ □□ □	1/3" CMOS □0803□ + NVP2470H) 2.0MP□□ □□ □	1/3" CMOS (SONY322 + NVP2441H□ 2.0MP□□ □□ □	1/3" CMOS (AR0330 + NVP2470H) 3.0MP□□ □□ □
□□	PAL / □□					
□□ □□	TVI/CVI/AHD	TVI/CVI/AHD	□□□□	□□□□	□□□□	□□□□
□□	3.6 □□□ 6 □□ Lens(M12)					
□□ □□□	36 □ × 5 □□ □□□					
□□ □□	30 □ □□ □□					
□□□ □□	0.01 lux F1.2					
□□	4/25 ~ 1/45,000s					
□□	□□					
BLC	□□					
OSD	□□					
□□	□□ / □□ / □□ / □□					
□/□	□ □□ □□ Auto(ICR) / □□ / □□					
□□ □□	□□ 500 □ □□ 75-3 □□ □□					
□□ □□	□□ 12V±10%					
□□	-30 ° C ~ + 60 ° C/□ □ 95 %rh □□ □□□					
□□						
□□	IP66 □ □□					

□□	2 □
□□ □□	4W □□

□□□□□

□□□ □□□ □□□ □□□ □□□ □□□ □□□ □□□ □□□□□□□□□□□□□□□□□□□

● FAQS

M'TEAM

□□□□□□□□□□□□□□ Q1:Can □□

□□□□□□□□□□□□□□□□□□□□□□ Dvr □□□□□□□□□□□

Q2:Can □□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□ 1 □□

□□ 3□ □□□□□□□□□□□□□

□□□□□□□ OEM □□□

Q4:How □□□□□□□□□□□□□□□□□□

□□ AHD □□□ 12V □□□□□□□□□□□□

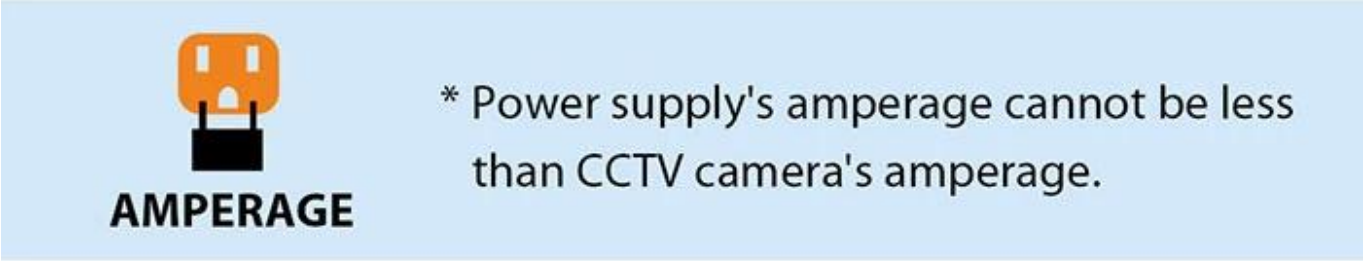

VOTAGE DROP * Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

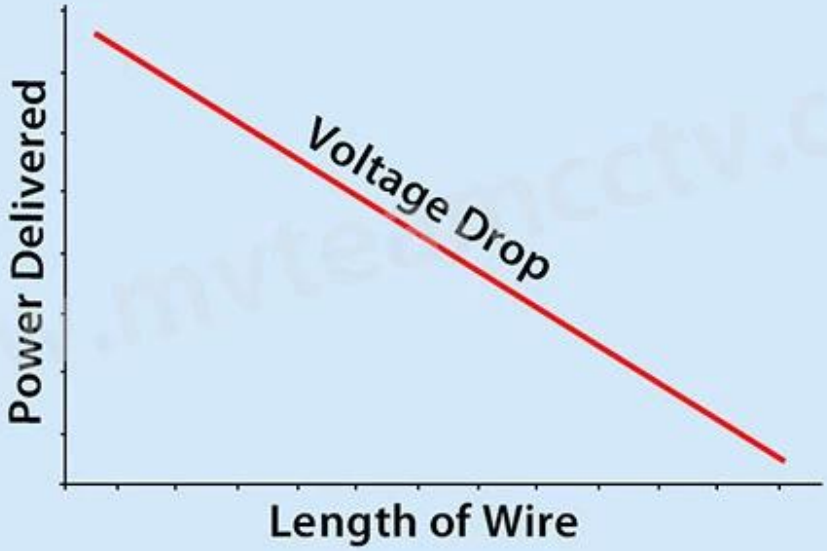

Voltage Drop(%)

Copyright All rights reserved

□□□ MVTEAM □□□□□□□□□□□ □□□

□□□ □□□□□□□□ □□□□□□□□

□□□□□

□□□□□□□□□□□□□□ □□□□.
□□□□□□□□□□□□□□□□
□□□□□ □□□□□□□ ***www.mvteamcctv.com*** □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□