



# Wireless(MVT-K04T)



IP Camera

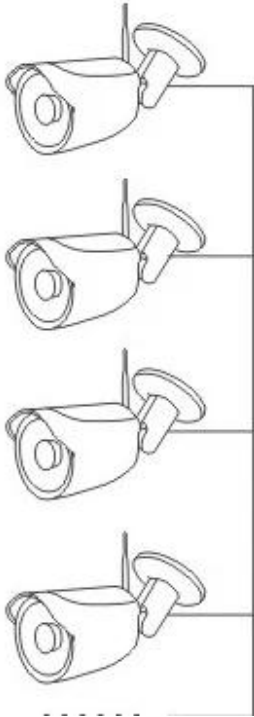

Display device

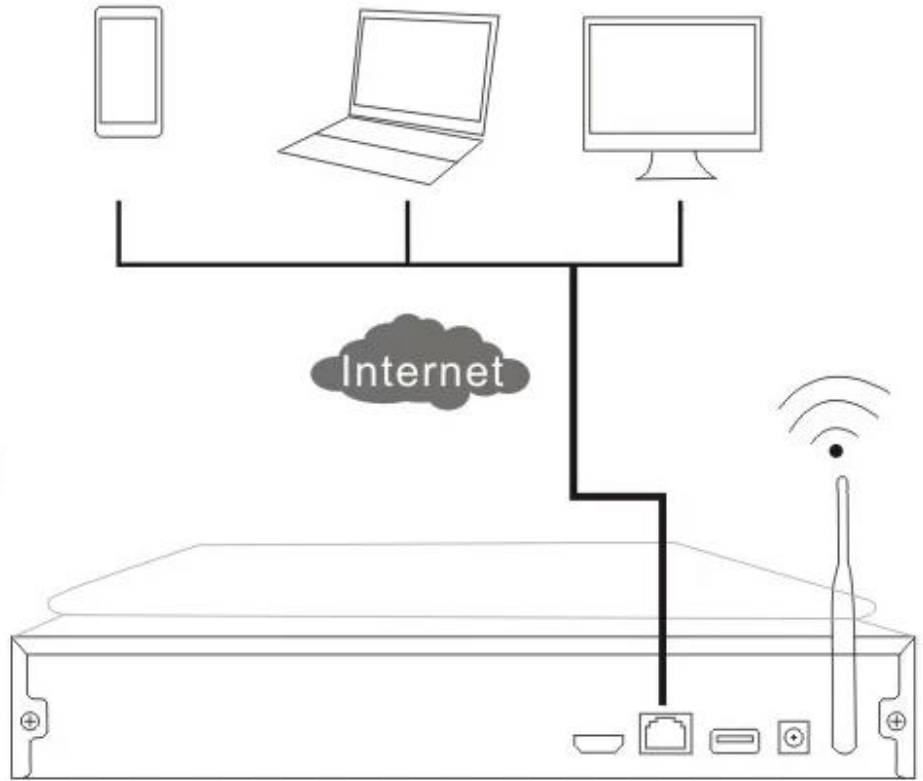

## NVR

- 1 4 1080P HD NVR 10 1080P WIFI
- 4 1080P
- 4 12V (DC) / 2A
- 1 1080P
- 1 CD CMS



## 1-4 NVR

### FEATURES



- \* 10" (1280 \* 1024) 330
- \* WIFI
- \* 802.11b/g/n 150Mbps

- \* Hdmi 1080P
- \* 4 \* 720 P; 4 \* 960 P \* 960 4 \* 720 P H;
- \* 3 \* USB 3.0 4 TB P2P x1

**SPECS**



NVR		
	Linux	
AV 1080P/720P	4	
	broadband	20Mbps
AV 1080P/720P	HDMI	1ch 1024 x 768 1366 x 768 1440 x 900 1920x1080p
AV 1080P		D1/720 P
		4
		USB
		1 * SATA
		4
		1 RJ45 10M/100M 2 WIFI
	USB	3 USB 2.0
		UPnP ( & )SMTP PPPoE DHCP IP .....
		DC12V3A
		≤ 5w HDD)
		-10°C~ + 55°C
		10%~ 90%
		257mm(W)×210mm(V)×45mm(H) ≤1Kg

**PRODUCT PICTURE**





## 2 720 P 摄像头

\* 1.0M / 720p 摄像头 IPC

\* 摄像头

\* 3.6 摄像头

\* 3 摄像头 LED 摄像头30 摄像头

\* 摄像头 IP66

### ● SPECS

M'TEAM

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

### ● PRODUCT PICTURE

M'TEAM



3-12V (DC) / IP 2A



4-CD □□□□□□□□



5 □





## ● FACTORY & OFFICE

**M TEAM**



## ● EXHIBITIONS

**M TEAM**

