



# IP DVR



## IP Camera

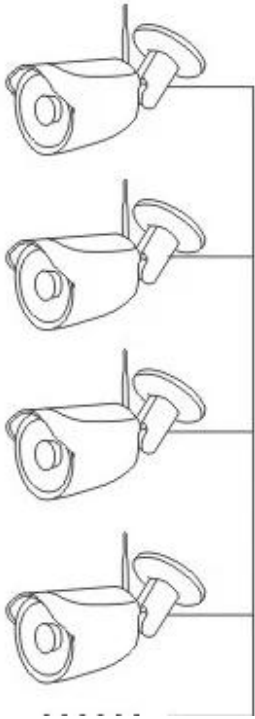

## Display device

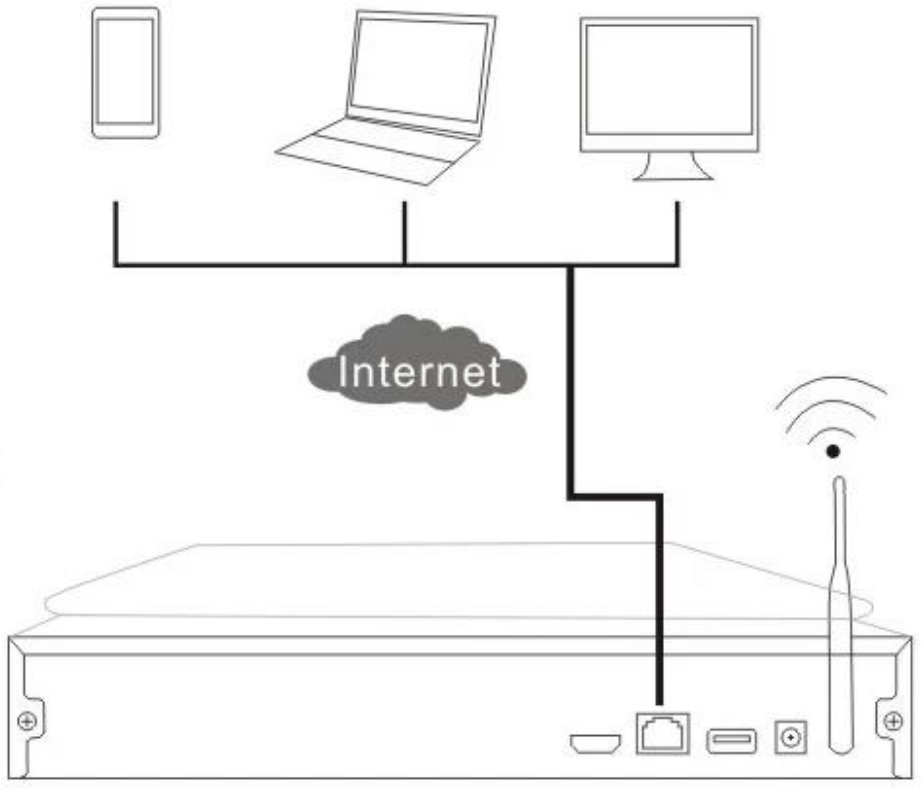

# NVR

- 1 \* 4CH NVR 10" WIFI
- 4 \* 12V DC / 2A
- 1 \* CD CMS



## 1-4CH NVR

### FEATURES



- \* 10" 1280 \* 1024 330
- \* Wi-Fi 802.11b / g / n 150Mbps
- \* HDMI
- \* 4 \* 720P; 4 \* 960P 4 \* 960H 4 \* 720P;

\* 3 USB 4TB P2P X1

● SPECS



NVR		
	Linux	
AV		4
	broadbank	20Mbps
AV	HDMI	1024x768, 1366x768, 1440x900, 1920x1080p
AV		D1 / 720P
		4
		Maual
		USB
		1 * SATA
		4 TB
		1 RJ45 10M / 100M 2
	USB	3 USB 2.0
		SMTP survice PPPoE DHCP IP ...
		DC12V3A
		≤5W HDD
		-10°C + 55°C
		10~90 RH
		257x210x45 H HDD ≤1Kg

● PRODUCT PICTURE





## MVTEAM NVR



## MVTEAM NVR



## 2-720P

### FEATURES



- \* 1.0M / 720P IPC
- \* IR CUT
- \* 3.6mm
- \* 3 LED 30M
- \* IP66

### SPECS



<b>Wireless Camera Specs</b>	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

● **PRODUCT PICTURE**



3-12VDC / 2A



4-CD□□□□□□□□□□



5□



□□□□NVR□□

**4CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC

**4CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC

**8CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC



## ● FACTORY & OFFICE

**M TEAM**



## ● EXHIBITIONS

**M TEAM**

