360 Grad versteckte Überwachungskamera Innen-VR Wifi Glühlampenkamera H100-E

FEATURES

* Nehmen Sie CMOS-Bildsensor, mit hoher Auflösung 1.3MP, 2MP, 3MP für Ihre Wahl an
* 360 Grad weiter Betrachtungswinkel, kein blinder Bereich, anwendbar auf verschiedene Szenarien, unterstützt 4 verschiedene Betrachtungsmodi
* Unterstützung von Zwei-Wege-Audio, Sprachansage.
* Automatische Umschaltung des ICR-Infrarotfilters, verwirklichen die reale Tag- und Nachtüberwachung
* Unterstützt die standardmäßige klare HD-Auflösung zum Ansehen und zur Anpassung an verschiedene Netzwerkumgebungen
* Unterstützt die Echtzeitüberwachung von Mobiltelefonen
* Unterstützt PTZ-Steuerung, Fernaufzeichnung, Audio- und Videoaufzeichnung
* Globale Netzwerkabdeckung, jederzeit und überall
* Unterstützung für mobile APP N_eye 3C

Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.

Multi-Angle Monitor

Support multi-scene modes

E PTZ

SPLIT SCREENS

ROLLER

CORRIDER

Video footage storage

Support max 128GB micro TF card for recording.

Note: Memory cards not included in the package please purchase separately

Intergrated with LED illumination

www.mvteamcctv.com

Show Appearance

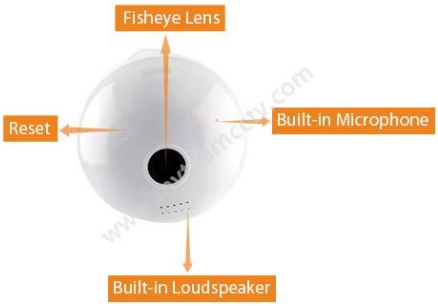

Mobile Phone View

N_eye3C

Download the App

Scan QR code to download the APP or
Search Neye3C in APP Store/Android Market

Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc.		
		(through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection,		
		video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps,11g :54Mbps,11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

Versand: Basierend auf Ihren Anforderungen wählen Sie die beste Versandart.

Kontaktiere uns:

Wenn Sie Fragen haben, wenden Sie sich bitte an ***Kontaktiere uns***.

Ihre Aufmerksamkeit für unser Unternehmen wird sehr geschätzt.
Willkommen zu besuchen unsere offizielle website ***www.mvteamcctv.com***

Verwandte Artikel über Wifi IP-Kamera:

Wie stelle ich die Bewegungserkennung für eine Wifi-IP-Kamera ein?
Wie lange können mit einer TF-Karte Videoaufzeichnungen für WLAN-Kameras gespeichert werden?
Wie kann ich die MVTEAM Wifi IP-Kamera auf einem Computer aus der Ferne anzeigen?