

# Cámara de CCTV oculta de 360 grados Cámara VR Wifi para interiores H100-E

## ● FEATURES

M'TEAM

- \* Adopte el sensor de imagen CMOS, con alta resolución 1.3MP, 2MP, 3MP para su opción
- \* Ángulo de visión amplio de 360 grados, sin área ciega, aplicable a diferentes escenarios, compatible con 4 modos de visualización diferentes
- \* Soporte de audio de dos vías, mensaje de voz.
- \* La conmutación automática del filtro infrarrojo ICR, realiza el monitoreo real día y noche
- \* Admite la resolución de alta definición, clara y estándar para ver, para adaptarse a la variedad de entornos de red
- \* Soporte de telefonía móvil en tiempo real.
- \* Soporte de control PTZ, captura remota, grabación de audio y video
- \* Cobertura de la red global, en cualquier momento y en cualquier lugar.
- \* Soporte de aplicación móvil N\_eye 3C

# Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.



## Multi-Angle Monitor


Support multi-scene modes



**E PTZ**



**SPLIT SCREENS**

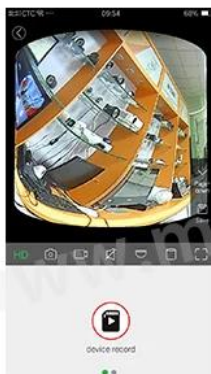

**ROLLER**



**CORRIDER**

# Video footage storage

Support max 128GB micro TF card for recording.



—▶ 8:30 —▶ 14:30 —▶ 20:08 —


Note: Memory cards not included in the package  
please purchase separately



# Intergrated with LED illumination



# | Show Appearance |

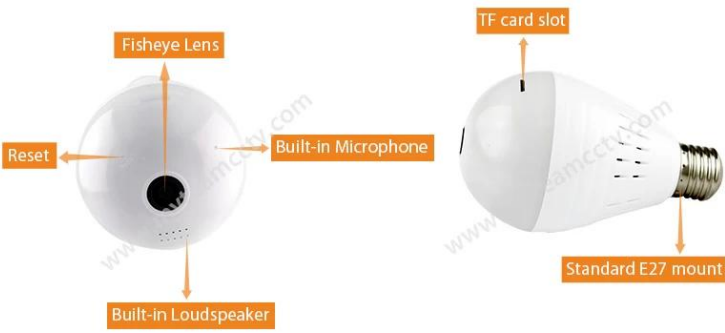

# Mobile Phone View



Download the App



Scan QR code to download the APP or  
Search Neye3C in APP Store/Android Market



Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc. (through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps, 11g :54Mbps, 11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

▼ Shipping
M'TEAM



Envío: Con base en tus demandas para elegir el mejor forma de envío.

### Contáctenos:

Si tiene alguna pregunta, bienvenido a [Contáctenos](#).

Su atención a nuestra empresa es muy apreciada.

Bienvenido a visitar nuestro sitio web oficial [www.mvteamcctv.com](http://www.mvteamcctv.com)

**Artículos relacionados sobre la cámara IP Wifi:**

[¿Cómo configurar la detección de movimiento para la cámara IP Wifi?](#)

[¿Cuánto tiempo graba un video puede ahorrar una tarjeta TF para cámaras WiFi?](#)

[¿Cómo ver de forma remota la cámara IP MVTEAM Wifi en la computadora?](#)