

**Main Features:**

1. Economical Security camera
2. Nice image quality and cheap price
3. widely compatible, able to match AHD DVR and All Standalone DVR
4. Easy to operate, Plug and Play
5. Advanced CMS software supporting 3G remote view

**Application Places**

Apply to the financial, supermarket, telecommunications, government, schools, airports, factories, hot els, museums and other places of requirement of high-definition.


| Model                | MVT-D43410                               | MVT-D4341Z                               | MVT-D4351E  |
|----------------------|--|--|---|
| Active Pixel         | P: 720(H)×576(V)<br>N: 720(H)×487(V)     | 728*488                                  | P: 976*582<br>N: 976*494                              |
| Resolution           | 600TVL                                   | 700TVL                                   | 700TVL  |
| Video Out            | 1.0Vp-p Composite Signal (75ohm)         | 1.0Vp-p Composite Signal (75ohm)         | 1.0Vp-p Composite Signal (75ohm)                      |
| SYNC                 |  | Internal                                 |   |
| Sensor               | PC7030                                   | PC3089                                   | P: ICX811AK<br>N: ICX810AK                            |
| Minimum Illumination | 0.01Lux                                  | 0.01Lux                                  | 0.05Lux   |
| Gama adjust          | 0.45                                     | 0.45                                     | 0.45  |
| Electric Shutter     | PAL:1/50s-1/100000s NTSC:1/60s-1/100000s | PAL:1/50s-1/100000s NTSC:1/60s-1/100000s | PAL:1/50s-1/100000s NTSC:1/60s-1/100000s              |
| S/N Ratio            | 48dB(min)(AGC closed)                    | 48dB(min)(AGC closed)                    | 48dB(min)(AGC closed)                                 |
| DNR                  | -  | -  | 2D-DNR  |
| AWB                  | AUTO                                     | AUTO                                     | ATW/PUSH/USER1/<br>USER2/ANTI CR/<br>MANUAL/PUSH LOCK |
| AGC                  | AUTO                                     | AUTO                                     | AUTO  |
| BLC                  | -  | -  | ON/OFF  |
| OSD                  | -  | -  | YES   |
| D-WDR                | -  | -  | LOW/MID/HIGH  |
| SWDR                 | -  | -  | -   |
| HLC                  | -  | -  | ON/OFF  |
| D-Zoom               | -  | -  | -   |
| IR-Smart             | -  | -  | ON/OFF  |
| Day/Night            | -  | -  | Auto[]Color[]<br>B/W[]Ext1[]Ext2                      |
| Motion Detection     | -  | -  | 4 areas optional                                      |
| Language             | -  | -  | 8 kinds   |

|                       |   |   |   |
|-----------------------|---|---|---|
| Power                 | 50mA  | 50mA  | 80mA  |
| Dissipation           |   |   |   |
| Power Input           | DC12V±1V  | DC12V±1V  | DC12V±1V  |
| Operation Temperature | Temperature -10°C~+60°C, Humidity less than 85%RH | Temperature -10°C~+60°C, Humidity less than 85%RH | Temperature -10°C~+60°C, Humidity less than 85%RH |

● PRODUCT PICTURE



● FACTORY & OFFICE

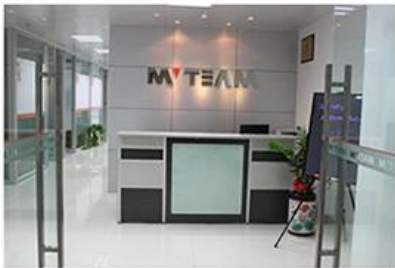

● EXHIBITIONS

