

China Factory Wholesale 1080P 10X Zoom 4" Indoor Mini IP PTZ Camera(MVT-NI502)

● FEATURES

MVTEAM




IP PTZ Camera Automatic cruise settings via CMS
MVTEAM Author: MVTEAM
Duration: 00:02:42
Date: 2016-01-08

CAMERA SPEC	
Sensor	1/2.7" CMOS (3516C+OV2715),2MP/1080P
Angle	68°/ 6.7°(Wide-Tele)
Lens	Focal length 5.1-51mm
Zoom	10x Optical Zoom
Min. Illumination	0.02LUX
Iris	Auto
White Balance	Auto/Manual/indoor/outdoor
IRcf Control	Auto* / Manu (soft)
Focus Length	~1.0m(tele)~0.01m(wide)
Signal Process	HIS3516C
White Balance	Auto* / Manu (R Gain/B Gain, Level: UP~DOWN)
IRcf Control	Auto* / Manu (soft)
Specification	
DSP	3516C+OV2715
IR range□	25m~35m
Ethernet	10Base -T, /100Base-TX, RJ45 Connector
Frame	25/30 fps
Image compression	H.264/MJPEG
Dual stream	Support
Onvif	Onvif 2.4 Ver.
Protocols	TCP/IP.HTTP.DHCP.PPPoE.UDP.RTP/RTCP.DNS.DDNS .UPnP.SMTP
Manual speed	Pan□0.2°□200°/s□
	Tilt□0.2°□100°/s□
Preset speed	200°/S
Rotation	Continuously 360°□tilt 0□90° with auto-flip
Speed Proportion	Human-oriented focal length/speed adaptation
Preset	128 preset, title can be edited
Auto-flip	Tilt down 90°, with auto-flip 180°

Scan	355° programmable □1 scan
Pattern	1 patterns, time and speed can be set
OSD	Built-in
Privacy	Support
Temperature	-20°C□+60°C
Humidity	0□95%□Non-condensation□
Protection grade	IP66, lightning-proof, surge-proof
Power/ consumption	DC12V/ 24W(IR on)
Net weight	2.5kg

▼ Sales Office and Sample room **M' TEAM**

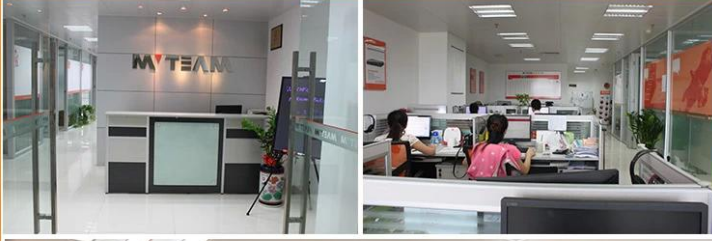

▼ Our factory and production workflow **M' TEAM**



▼ Trade Shows **M' TEAM**



Contact us:

If you have any question, welcome to [Contact us](#).

Your close attention to our company is highly appreciated.

Welcome to visit our official website www.mvteamcctv.com.