

Main Features:


- 1.0M/1.3M/2.0M pixel full real time optional, Highest resolution 1080P
- •follow HD and CVBS video standard
- •6mm(M12) fixed Lens
- •Water Resistant Rate:IP66
- support transmission distance above 500M under general 75- 3 coaxial cable without loss
- High-speed, long-distance, real-time transmission
- support OSD menu
- with ICR switching , to achieve Day and Night monitoring

•Used genuinely imported 3rd generation IR LEDs and megapixel high definition lens, these cameras have been featured as great performance in color restoration, image definition and night viewing.

Application Places:

Apply to the financial, supermarket, telecommunications, government, schools, airports, factories, hot els, museums and other places of requirement of high-definition.

SPECS

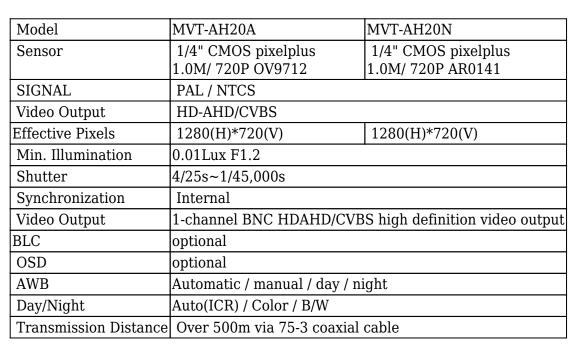





Power Supply	DC 12V±10%
Working Environment	30°C~+60°C/Less than 95%RH(no condensation)
Power Consumption	4W MAX

<section-header>



FACTORY & OFFICE

MTEAM



EXHIBITIONS

ΜΥΤΞΛΜ

