Outdoor IP WiFi Camera Al Humanoid Detection Early Warning Waterproof HD 2MP 1080P CCTV Surveillance Smart Security Camera



FEATURES


MYTEAM

- * Waterproof Outdoor WiFi Smart Security Camera, high-strength plastic housing
- * Support sound and light warning
- * Al humanoid detection early warning / local intelligent white light early warning / Custom cameraside alarm audio
- * With 2pcs IR led lights and 2pcs white led lights, support dual light intelligent control, IR distance 30m
- * Max suport 128G TF card storage, with CMS, support live viewing and saving video records to windows PC
- * Onvif 2.4, compatible with NVR
- * Waterproof IP66n

- * Come with bracket
- * Voltage DC12V/1A , App: N_eye 3C

Mobile Phone View



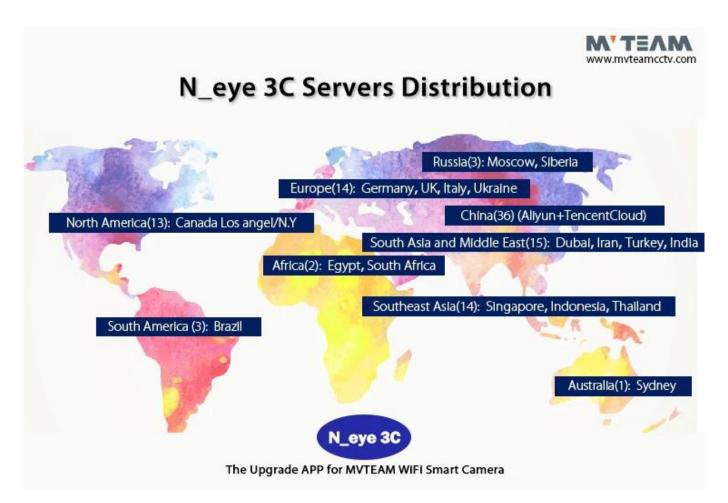

SPECS




| Model No. | | H100-F8 |
|--------------------------|-------------------------------|--|
| Camera | Sensor type | CMOS |
| | Minimum illumination | 0.02Lux @(F2.0,AGC ON) ,0 Lux with IR |
| | shutter | Shutter adaptation |
| | Camera lens | 3.6mm |
| | Lens interface type | M12 |
| | Day and night conversion mode | ICR infrared filter |
| | Digital noise reduction | 3D digital noise reduction |
| Compression standard | Video compression standard | H.264 |
| | Coding type | H.264 Main Profile |
| | Video compression rate | HD, SD, rate adaptation. |
| | Audio compression standard | AAC |
| | Audio compression rate | Rate adaptation |
| lmage | Maximum image size | 1920 × 1080 |
| | frame rate | Max:25fps network transmission rate: adaptive adjustment |
| | Image setting | Brightness, contrast, saturation, etc. (through the client to adjust the setting) |
| Network function | Storage function | Support Micro SD card (max 128G) |
| | Intelligent alarm | Video is lost, the network is disconnected, and the power is disconnected. |
| | General functions | Al humanoid detection early warning / local intelligent white light early warning / Custom camera-side alarm audio Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom |
| Wireless parameter | Wireless standard | IEEE802.11b, 802.11g, 802.11n Draft |
| | frequency range | 2.4 GHz ~ 2.4835 GHz |
| | Channel bandwidth | Support 20/40MHz |
| | security | 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS |
| | transmission speed | 11b: 11Mbps,11g :54Mbps,11n :135Mbps |
| General specification | temperature and humidity | -10 C \sim 50 C, the humidity is less than 95% (no condensation) |
| | Power | DC 12V |
| | Network connection | 2.4Ghz WiFi or RJ45 wired |
| | IR distance | 30m |
| | Size | 185mm*85mm |
| | Waterproof grade | IP66 |


Pictures

|Show appearance|



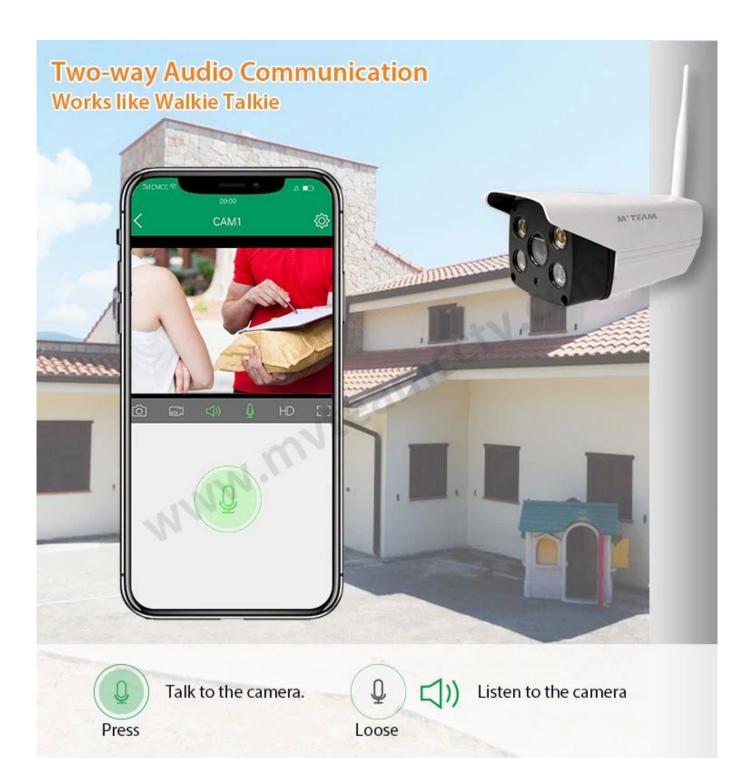



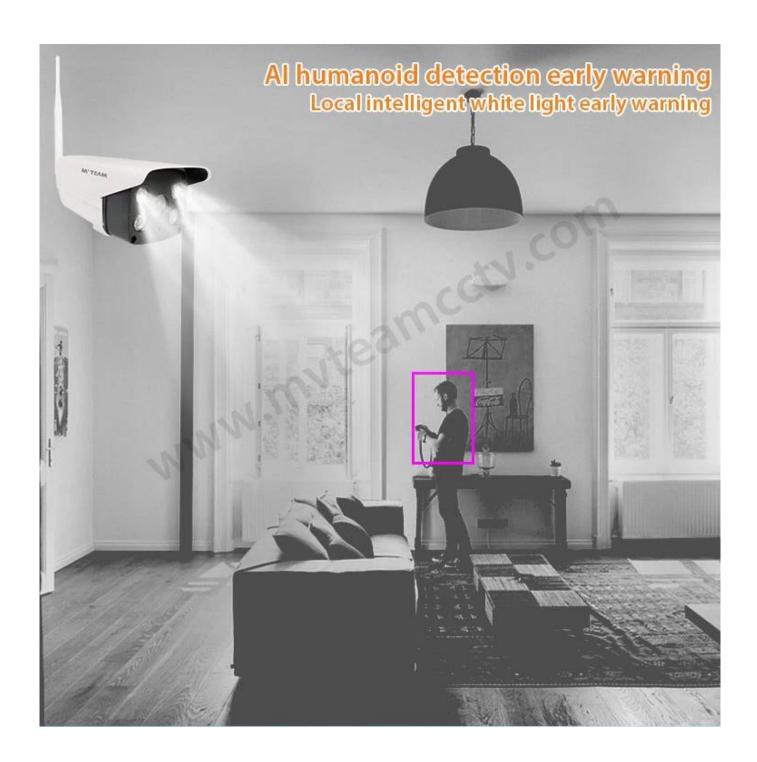





Wherever you are, you can remotely visit the camera to see live videos or playback recorded videos via phone/tablet/PC

A variety of applications















CE, ROHS, FCC Certificates



Contact us:

If you have any question, welcome to <u>Contact us</u>.
Your close attention to our company is highly appreciated.
Welcome to visit our official website <u>www.mvteamcctv.com</u>