



10 HD MVT-K04T 4CH LAN IP NVR



IP Camera

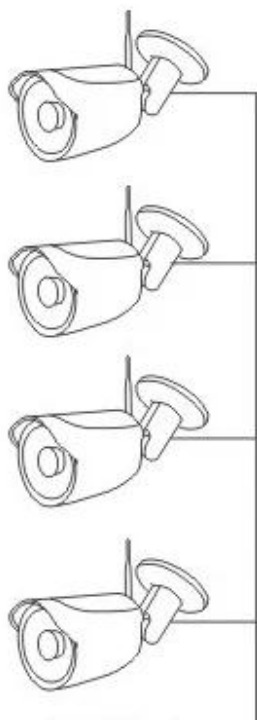

Display device

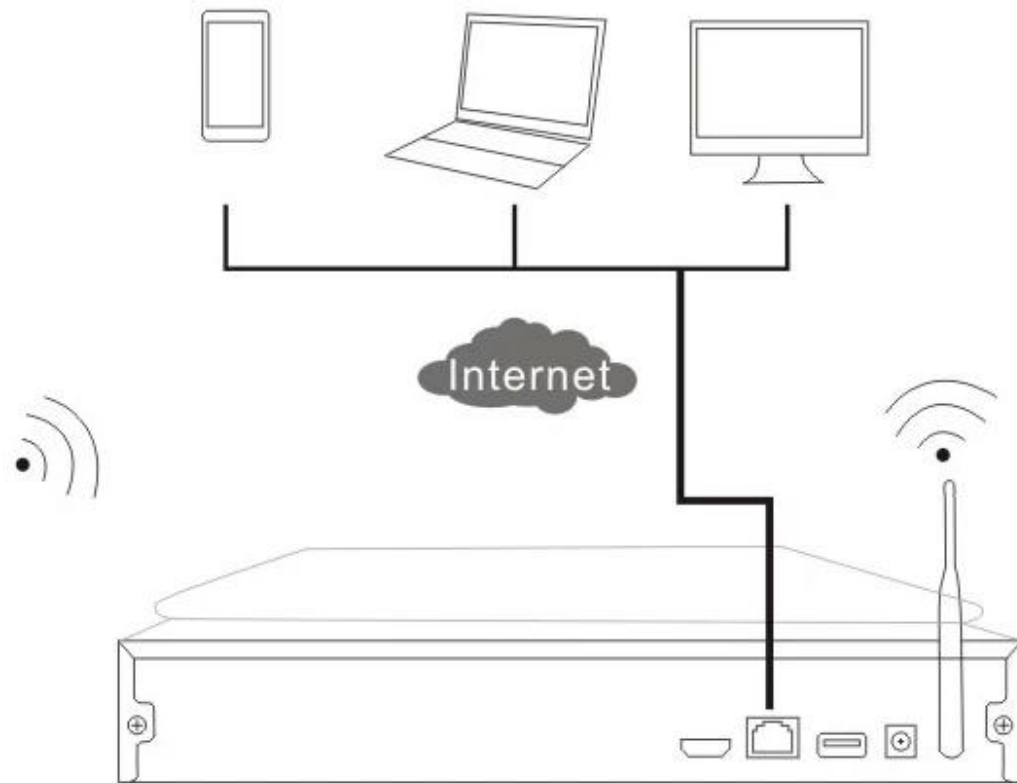

10 " LAN 1 4ch HD NVR  
4 HD IP  
4 12V DC / 2A  
1  
1 CD CMS



### 1-4CH NVR

#### FEATURES



\* 10 " HD 1280 \* 1024 330  
\* Wi-Fi  
802.11b / g / n 150Mbps

- \* HDMI
- \* 4 \* 720P \* 960P \* 960H \* 720P
- \* 3 USB HDD 4TB P2P x1

**SPECS**



NVR		
	OS	
AV		4CH
	broadbank	20Mbps
AV	HDMI	1CH 1024x768, 1366x768 1440x900, 1920x1080p
AV CODEC		D1 / 720P
		4CH
		Manual
		USB
		1 * SATA
		4 TB
		1 RJ45 10M / 100M 2 WI-FI
	USB	3 USB 2.0
		UPnP, 038, SMTP, service, PPPoE, DHCP, AN IP...
		DC12V3A
		≤5W HDD
		-10°C + 55°C
		10%~90% RH
		257W x 210V x 45H
		≤1Kg HDD

**PRODUCT PICTURE**





MVTEAM NVR



NVR MVTEAM



2-720P IP

FEATURES



- \* 1.0M / 720P IPC
- \* IR
- \* 3.6
- \* 3pcs 3 LED 30 IR
- \* IP66

SPECS



<b>Wireless Camera Specs</b>	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

● **PRODUCT PICTURE**



IP 3-12V DC / 2A



4-CD



5-



□□□□NVR□□□□

**4CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC

**4CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC

**8CH Wireless NVR Kit**  
[www.mvteamcctv.com](http://www.mvteamcctv.com)

**M' TEAM** CE FC



## ● FACTORY & OFFICE

**M TEAM**



## ● EXHIBITIONS

**M TEAM**

