



CE ROHS FCC MVT-K04 4CH CCTV

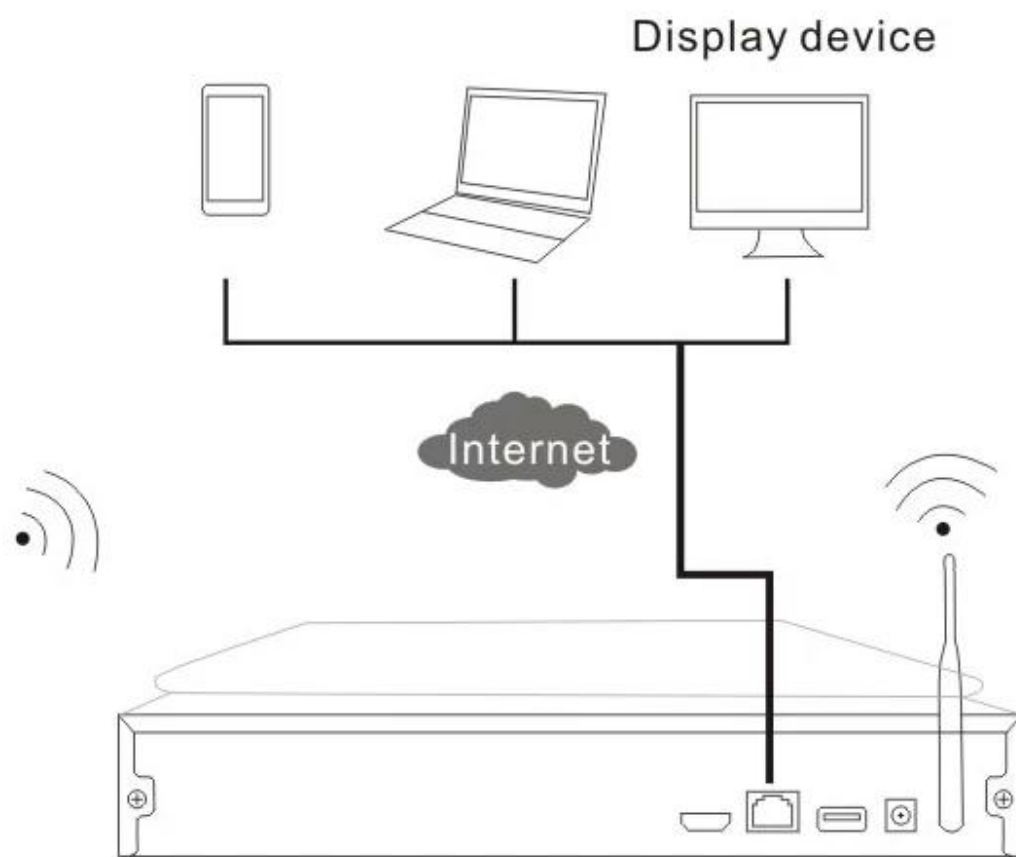

IP Camera

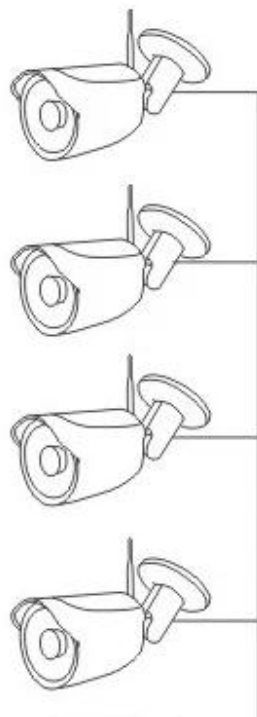

NVR

7 "LAN 1 4ch HD NVR
4 HD IP
4 12V DC / 2A
1
1 CD CMS



1-4CH NVR

FEATURES



- * 10 " HD 1280 * 1024 330
- * WI-FI
- * 802.11b / g / n 150Mbps
- * HDMI
- * 4 * 720P 4 * 960P 4 * 960H 4 * 720P


* 3個USBポート、HDD 4TB、P2P×1

SPECS

MVTEAM

NVR		
OS	OS	
AV	AV	4CH
	AV broadband	20Mbps
AV	HDMI	1CH 1024x768, 1366x768, 1440x900, 1920x1080p
AV CODEC	AV	D1 / 720P
	AV	4CH
AV	AV	Manual
	AV	USB
	AV	USB
AV	AV	1 * SATA
	AV	4 TB
AV	AV	1 RJ45 10M / 100M
	AV	2 Wi-Fi
AV	AV	3 USB 2.0
	AV	UPnP & 038;SMTP
AV	AV	survice PPPoE
	AV	DHCP AN IP
AV	AV	DC12V3A
	AV	≤5W HDD
	AV	-10°C + 55°C
	AV	10% RH
	AV	257W × 210V × 45H
	AV	≤1Kg

MVTEAM NVR

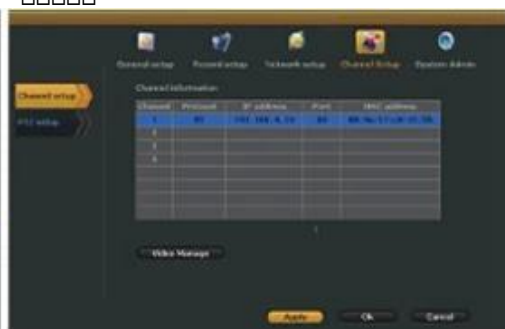

XXXXXXXXXXXXXXXXXXXXNVRXXXXXXXXXXXXMVTEAM



2-720PXXXXXXXXXXIPXXXX

FEATURES

MVTEAM

- * 1.0M / 720PXXXXXXXXIPC
- * IRXXXX
- * 3.6XXXXXXXXXXXX
- * 3pcsXXX3XXLEDXXXX30XXXXIRXX
- * XXXIP66

SPECS

MVTEAM

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10℃ to +50℃ / 30% to 80% RH
Storage Temperature/Humidity	-20℃ to +60℃ / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

● PRODUCT PICTURE

M' TEAM



IP 3-12VDC / 2A



4-CD



5-



□□□□NVR□□□□

4CH Wireless NVR Kit
www.mvteamcctv.com

M'TEAM CE FC

4CH Wireless NVR Kit
www.mvteamcctv.com

M'TEAM CE FC

8CH Wireless NVR Kit
www.mvteamcctv.com

M'TEAM CE FC

● FACTORY & OFFICE

M TEAM



● EXHIBITIONS

M TEAM

