


10 "HD MVT-K04T 4CH NVR

Diagram

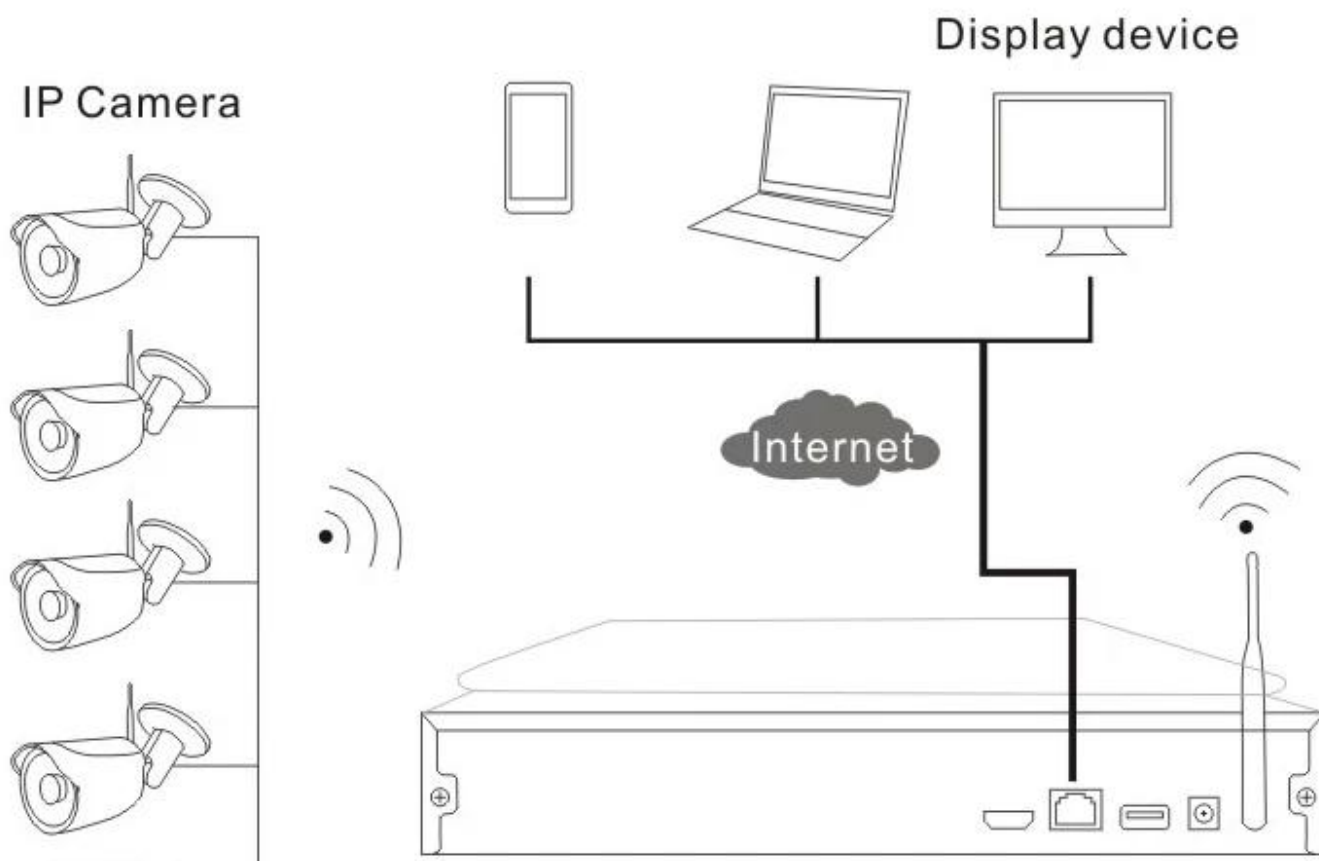

Specifications

10 "HD LAN 1ch 4ch HD NVR
4 HD IP
4 12V DC / 2A
1
1 CD CMS

Features

1-4CH NVR

FEATURES

M'TEAM

* 10 "HD 1280 * 1024 330

* Wi-Fi

802.11b / g / n 150Mbps

- * HDMI
- * 4 * 720P * 960P * 960H * 720P
- * 3 USB HDD 4TB P2P x1

SPECS

M' TEAM

NVR		
Model	OS	
AV/	Channels	4CH
	Max. bandwidth	20Mbps
AV /	HDMI	1CH 1024x768, 1366x768, 1440x900, 1920x1080p
AV CODEC	Video	D1 / 720P
	Audio	4CH
IO	Video/Audio	Manual
	USB	USB
	USB	USB
Storage	Storage	1 * SATA
	Storage	4 TB
Network	Network	1 RJ45 10M / 100M, 2 WI-FI
	USB	3 USB 2.0
Protocol	Protocol	UPnP, 038, SMTP, E, service, PPPoE, DHCP, AN IP...
Power	Power	DC12V3A
	Power	≤5W HDD
	Temp	-10°C + 55°C
	Humidity	10%~90% RH
	Power	257W x 210V x 45H
	Weight	≤1Kg

PRODUCT PICTURE

M' TEAM

MVTEAM NVR



NVR MVTEAM



2-720P IP

FEATURES

- * 1.0M / 720P IPC
- * IR
- * 3.6
- * 3pcs 3 LED 30 IR
- * IP66

SPECS

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10℃ to +50℃ / 30% to 80% RH
Storage Temperature/Humidity	-20℃ to +60℃ / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

● PRODUCT PICTURE

M' TEAM



IP 3-12VDC / 2A



4-CD



5-



NVR

4CH Wireless NVR Kit

www.mvteamcctv.com

CE

FC

RoHS

M' TEAM

4CH Wireless NVR Kit

www.mvteamcctv.com

CE

FC

RoHS

M' TEAM

8CH Wireless NVR Kit

www.mvteamcctv.com

CE

FC

RoHS

M' TEAM

● FACTORY & OFFICE

M TEAM



● EXHIBITIONS

M TEAM

