

5MP AHD TVI CVI CVBS 4 IN 1 5MP AHD CCTV MVT-AH14S

FEATURES



- * 5.0MP 1 / 2.5 "0521 CMOS
- * Fuhun FH8538M
- * HD 5.0mp
- * 4-in-1 AHD TVI CVI CVBS
- * AE AWB AES AGC
- IR
- 500M * 75-3
- * OSD
- * UTC DVR OSD

PARAMETERS

Parameters table (text is mostly illegible due to low resolution)

SPECS



Model	MVT-AH14S
Resolution	1 / 2.5" CMOS 0521 + 8538M 5.0MP
Standard	PAL / NTCS
Format	AHD / CVI / TVI / 960H
Lens	6mm M12
IR	2 LED 30m
Min Illumination	0.05Lux / F1.2 B / W 0.01Lux / F1.2
Shutter	1/25 30 S ~ 1 / 50,000 S
Frame Rate	5MP @ 25fps
S / N	62dB
Compression	BLC
OSD	
AWB	
IR / Lens	IR / CR / B / W
IR Range	75-300m
Power	DC 12V ± 10%
Operating Temp	-30°C + 60°C / 95% RH
Protection	IP66
Mounting	2
Power Consumption	4W MAX

□□

▼ Side View

M'TEAM



▼ Front View

M'TEAM



▼ Back View

M'TEAM



▼ Cables

M'TEAM



- Q1 如何選擇合適的電源線？
- 如何選擇合適的DVR？
- Q2 如何選擇合適的電源線？
- 如何選擇合適的MOQ？
- Q3 如何選擇合適的電源線？
- 如何選擇合適的OEM？
- Q4 如何選擇合適的電源線？
- 如何選擇合適的12V DC？




* Power supply's amperage cannot be less than CCTV camera's amperage.



VOTAGE DROP

* Power supply's wire will make voltage drop, so make sure not too long wire, and long wire with a thicker gauge. (Thicker gauge makes voltage drop more slowly).

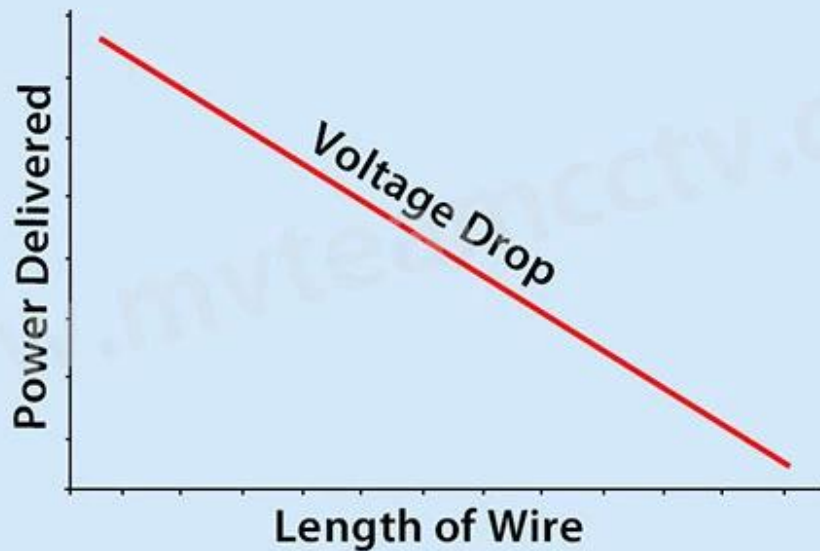

Voltage Drop(%)



Power Supply



Camera



Power Supply



Camera



Copyright All rights reserved

▼ Packages

M'TEAM

Brand Camera Package



Neutral Camera Package



Brand DVR Package



www.mvteamcctv.com MVTEAM Neutral

▼ Shipping

M'TEAM



www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com

www.mvteamcctv.com www.mvteamcctv.com CCTV