


無線監視カメラシステム Wireless(MVT-K04T)

無線接続

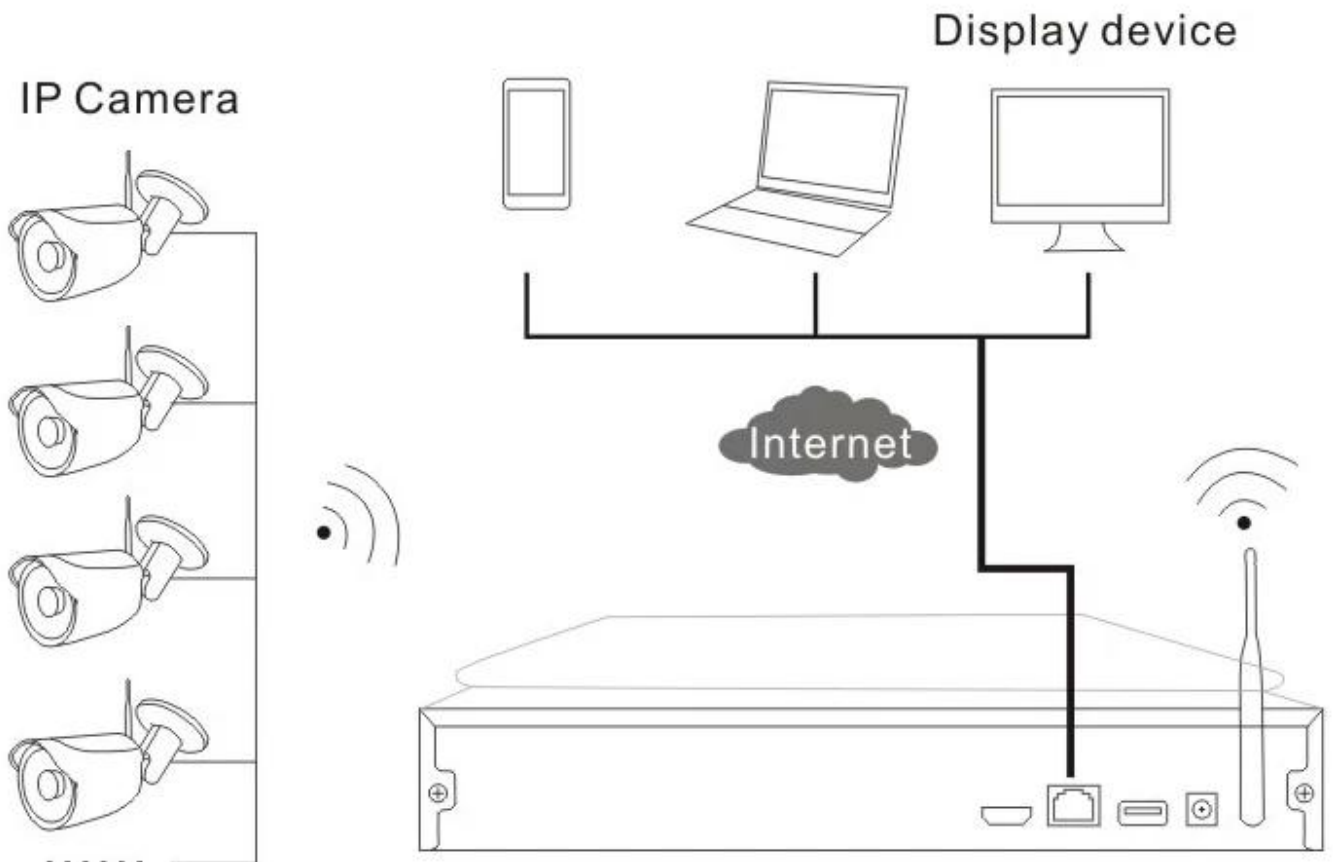

無線 NVR 無線接続

- 1 4 ch 無線 HD NVR 無線 10"液晶 LCD 無線WiFi 無線
- 4 無線 HD 無線 IP 無線
- 4 無線 12 v (DC)/2 a 無線
- 1 無線無線 無線無線 無線 無線
- 1 無線 CD CMS 無線無線無線無線

無線接続

1-4 ch 無線 NVR

● FEATURES



- \* 無線 10"液晶 HD 無線 (無線: 1280 \* 1024) 330 無線無線無線無線
- \* 無線無線無線無線無線 WI-FI 無線無線無線
- 150 mbps 802.11b/g/n 無線無線無線無線無線

\* HDMI 1080P

\* 摄像头: 4 \* 720 P; 4 \* 960 P; 4 \* 960 H, 4 \* 720 P;

3 \* USB 2.0 接口; HDD 4 TB 1 \* P2P 接口 x1

**SPECS**



NVR 规格		
操作系统	Linux OS	
AV (摄像头/通道) 数量	通道数量	4 CH
	网络带宽	20 mbps
AV (摄像头/通道) 数量	HDMI 接口	分辨率: 1024 x 768, 1366 x 768, 1 ch 1440 x 900 1920x1080p
AV 分辨率	分辨率	D1/720 P
	通道数	4 CH
接口规格	报警输入/输出	Manual 报警输入
	报警输入	报警输入
	报警输出	USB 报警输出
存储规格	接口	1 * SATA 接口
	容量	4 TB 硬盘
网络规格	网络接口	1 * RJ45 10 M/100 M 2 WIFI 接口
	USB 接口	3 USB 2.0
网络协议支持	网络协议	UPnP (设备发现) SMTP (邮件通知) PPPoE (宽带拨号) DHCP (动态 IP 地址) 等.
电源规格	电压	DC12V3A
	功率 (W)	(功耗 ≤5W HDD)
	工作温度 (°C)	-10°C ~ +55°C
	相对湿度 (%) RH	10% ~ 90%
	尺寸 (不含 HDD)	257mm(W) x 210mm(V) x 45mm(H) ≤1Kg

**PRODUCT PICTURE**





## 2 720 P IP

\* 1.0M/720 P IPC

\* IR

\* 3.6 mm

3 3 LED 30 m IR

\* IP66

### SPECS

M'TEAM

Wireless Camera Specs	
Image Sensor	1/4" Progressive Scan Sensor
Signal System	PAL/NTSC
Resolution	1280 x 720 16 : 9 High Definition
Minimum illumination	Color: 0.1 Lux; B/W: 0.01 Lux
Shutter	1/25s to 1/25,000s
Lens	3.6mm
OSD	Date Time & Title
White Balance	Auto
Day&Night	Auto / Color / BW
3D-DNR	Auto
Mirror/Flip	On / Off
Frame Specification	Three Streaming at the Same Time H.264 128x720@30fps or below H.264 640x480@30fps or below
S/N	> 39.1 Db
Interface	RJ45 / WIFI 802.11b/g/n
Anti-thunder Level	Standard IEC61000-4-5
Working Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Power Input	DC12V-1A
Power consumption	≤6W
Size	205(L)×70(W)×55 (H)mm
Weight	500g
Level of Protection	IP66

### PRODUCT PICTURE

M'TEAM



3-12 v (DC)/IP 2 a



4 CD



5



## ● FACTORY & OFFICE

**M TEAM**



## ● EXHIBITIONS

**M TEAM**

