


● FEATURES

- 1 0.1°/200°
- 2 IR 60
- 3 128
- 4 & 038
- 5 8 4 180
- 6 4
- 7 OSD
- 8
- 9 OSD
- 10 & PTZ
- 11
- 12
- 13 RS485
- 14 PELCO-D PELCO-P
- 15 TVS proof.IP66
- 16

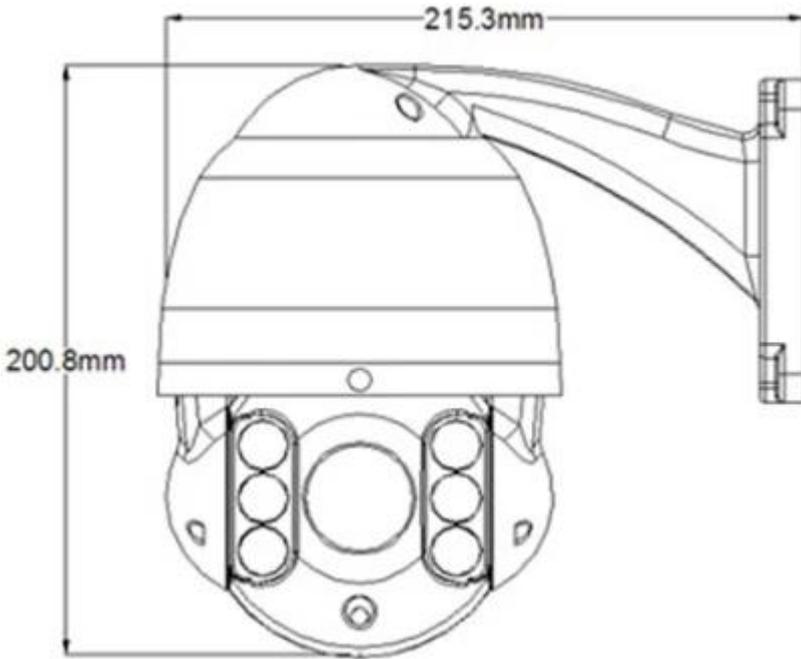

● SPECS

PTZ	
Horizontal	0.1°/200°
Vertical	0.1°/180°
Voltage	DC 12V
Viewing Angle	360° 0°/90°
Resolution	128
Zoom	90° 180°

FOV	355°
Resolution	4 MP (1920x1080) @ 180S
Frame Rate	4 MP @ 30FPS; 2 MP @ 60FPS
Remote	RS485
RS485	2400/4800/19200/9600 BPS
ID	1-254
Video	AHD / CVBS
Power	9W / 25W (IR_LED)
Temp	-10°C ~ 50°C
Weight	2.7kg
Camera	1/3" CMOS + NVP2431H
Resolution	1280x720
FOV	X10, F = 5.1mm, 51mm
APPR	55.2° / 3.2°
Sensitivity	0.5 lux, BW 0.1lux
S/N	52dB
ICR	
DNR	
HLC	
FLIP	OFF



● EXHIBITIONS

