Al Human Tracking Outdoor WiFi 2.5 Inch Mini PTZ Camera Waterproof 1080P HD Smart Home IP Security Surveillance Camera







You can record a voice, upload to the camera to be your DIY voice

• FEATURES M'TEAM

- * 2.5 inch Smart WiFi PTZ Camera, high-strength plastic housing
- * Support sound and light warning
- * Al humanoid tracking / Al humanoid detection early warning / local intelligent white light early warning / Custom camera-side alarm audio
- * With 4pcs IR led lights and 2pcs white led lights, support dual light intelligent control, IR distance 30m
- * P/T rotation: pan 355°, tilt 90°
- * Max suport 128G TF card storage, with CMS, support live viewing and saving video records to windows PC
- * Onvif, compatible with NVR
- * IP66 Waterproof design
- * Voltage DC12V/1A, App: N eye 3C

Mobile Phone View





N_eye 3C Servers Distribution

Russia(3): Moscow, Siberia
Europe(14): Germany, UK, Italy, Ukraine

North America(13): Canada Los angel/N.Y

China(36) (Aliyun+TencentCloud)

South Asia and Middle East(15): Dubal, Iran, Turkey, India

Africa(2): Egypt, South Africa

Southeast Asia(14): Singapore, Indonesia, Thailand

South America (3): Brazil

Australia(1): Sydney

N_eye 3C

The Upgrade APP for MVTEAM WIFI Smart Camera


SPECS

MYTEAM

Model No.		H100-G7
Camera	Sensor type	CMOS
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR
	shutter	Shutter adaptation
	Camera lens	3.6mm
	Lens interface type	M12
	Day and night conversion mode	ICR infrared filter
	Digital noise reduction	3D digital noise reduction
Compression standard	Video compression standard	H.264
	Coding type	H.264 Main Profile
	Video compression rate	HD, SD, rate adaptation.
	Audio compression standard	AAC
	Audio compression rate	Rate adaptation
lmage	Maximum image size	1920 × 1080
	frame rate	Max:25fps network transmission rate: adaptive adjustment
	Image setting	Brightness, contrast, saturation, etc. (through the client to adjust the setting)
Network function	Storage function	Support Micro SD card (max 128G)
	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.
	Conoral functions	Al humanoid tracking / Al humanoid detection early warning / local intelligent white light early warning / Custom camera-side alarm audio Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom

Wireless parameter	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft
	frequency range	2.4 GHz ~ 2.4835 GHz
	Channel bandwidth	Support 20/40MHz
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
	transmission speed	11b: 11Mbps,11g :54Mbps,11n :135Mbps
General specification	temperature and humidity	-10 C ~50 C, the humidity is less than 95% (no condensation)
	Power	DC 12V
	Network connection	2.4Ghz WiFi or RJ45 wired
	IR distance	30m
	Speed dome size	2.5 inch
	Waterproof grade	IP66


Pictures

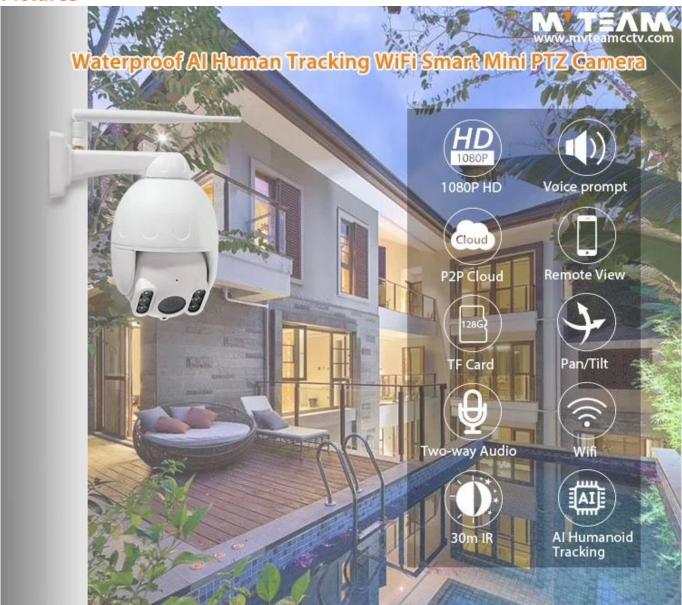


|Show appearance|





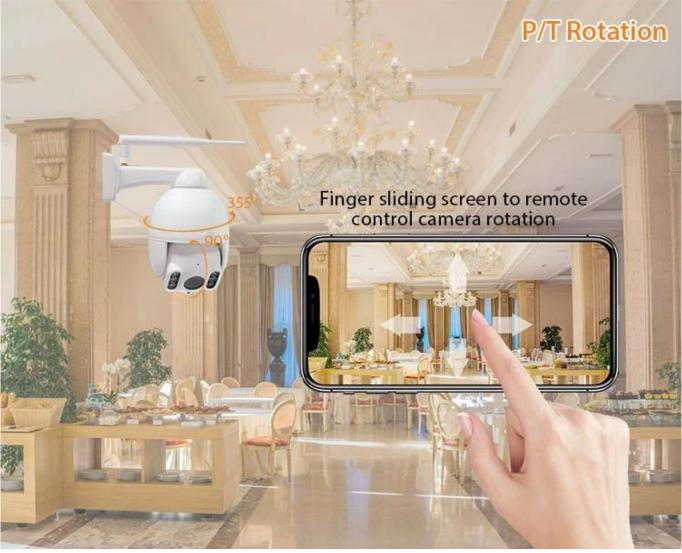

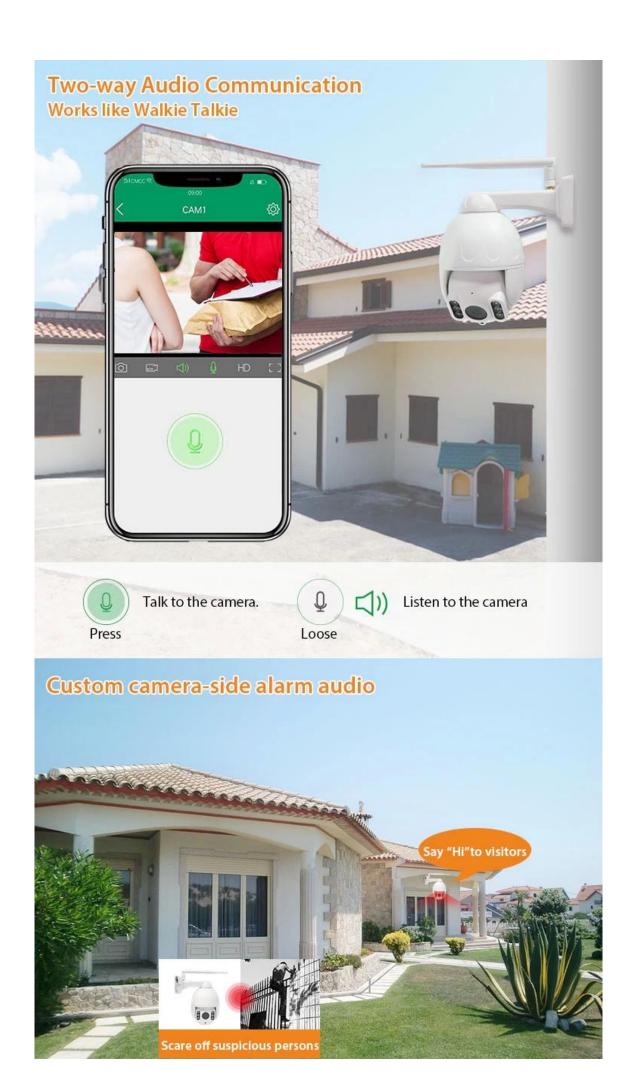





A variety of applications





CE, ROHS, FCC Certificates



Contact us:

If you have any question, welcome to <u>Contact us</u>.
Your close attention to our company is highly appreciated.
Welcome to visit our official website <u>www.mvteamcctv.com</u>