Promotion Price 8CH Hybrid Surveilllance DVR AHD TVI CVI CVBS NVR CCTV 6708H80C

● Features

Adopt Newest HiSilicon Chipset

New humanized User Interface

System come with 28 kinds of languages

Adjustable DVR menu transparency

Support backup video records to DVR built-in redundant HDD

Support playback different time period video records in one screen, save time on find useful video records

5-in-1 hybrid modes: AHD+TVI+CVI+CVBS+IP

DVR menu with Ping command, convenient to do DVR network testing

With UTC Function, control analog camera and PTZ camera on DVR thru coaxial cable

Support P2P remote view by CMS and IE browser

Come with cloud ID, easy to realize P2P remote view by scan the QR Codes

Support remote view, record, playback, receive motion detection alarm by Iphone and Andriod Smartphone

1.AHD: 8CH 1080N@12fps recording, 8CH 1080N@12fps playback

2.HVR: 4CH 1080N@25fps Analog + 4CH 1080P@25fps IP recording, 2CH 1080P@25fps playback

3.HVR: 2CH 1080N@25fps Analog + 6CH 1080P@25fps IP recording, 2CH 1080P@25fps playback

4.NVR: 8CH 1080P@25fps IP recording, 2CH 1080P@25fps playback

5.NVR: 4CH 3.0MP@25fps IP recording, 2CH 3.0MP@25fps playback

Model		6708H80C
Compression		H.264 Standard compression
Operation		Embedded Linux
Image coding-control		Image edit adjustable,both changable and fix stream optional
Dual stream		Can be set up in each channel
Monitor image quality		1080N 960*1080
Image dynamic detection		Multiple detection areas in each channel
Video framerate		AHD\TVI\CVI:8CH 1080N@20fps recording NVR:8CH 1080P@25fps IP recording
Image playback quality		AHD\TVI\CVI: 1CH 1080N playback NVR: 1CH 1080P@25fps playback
Video mode		Support manual, automatic, dynamic monitoring, alarm trigger video mode
Backup mode		U disk, USB portable disk, USB burn, Network storage and backup
Operate mode		Mouse, Remote controller,Front Panel Control
login locally		admin and password
Save recording		local hard disk and network
External interface	Video input	180P@25FPS/CH NVR , 1080N@20FPS/CH AHD TVI CVI
	Audio input	NO
	Network interface	10M/100M base-T Ethernet (RJ-45)
	USB connect port	2 x USB 2.0
	RS485	RS485*1
	Alarm input	NO
	Alarm output	NO
	Internal HDD	1 SATA HDD port
	Maximum capacity	Maximum 4TB each SATA
Cell phone monitoring		Support Window Mobile, iPhone,iPad, Android
Power		12V/2A
DVR size		255*45*235mm
Weight		<2.7kg(without HDD)

▼Packages

Brand Camera Package

Neutral Camera Package
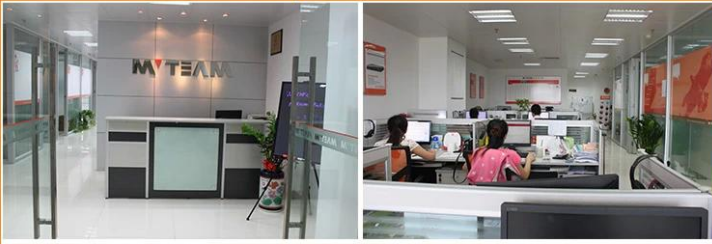
Brand DVR Package

▼Shipping

▼ Sales Office and Sample room

MVTEAM

▼ Our factory and production workflow

MVTEAM

Brush Pasting → SMT → Reflow Soldering → Inspection

Camera Test 2 ← Camera Test 1 ← Assembling ← Soldering

Waterproof Test → Ageing Test → Packing → Ready for shipping

▼ Trade Shows

MVTEAM

Contact us:

If you have any question, welcome to contact us.

Your close attention to our company is highly appreciated.

Welcome to visit our official website www.mvteamcctv.com to view video demos,download product catalog and read CCTV technical articles.