


## ● FEATURES

- 1 Pan 360° continuously, tilt 90° rotation, auto-flip, manual speed: 0.2°~200°/s.
- 2 IR range more than 60 m, constant current control, synchronous switch
- 3 128 presets (titles can be set);
- 4 Tour is based on presets, speed & park time of presets can be set.
- 5 8 programmable zones, 4 patterns, and each record time is not less than 180s.
- 6 4 scan, support scanning between left limit and right limit at an appointed speed.
- 7 Built-in OSD menu, can change information and parameter of dome through menu
- 8 Park action function, can auto-call presets or start-up tour, pattern and scan after dome idle for a period of time
- 9 Real clock function, can set auto-call preset or start-up tour, pattern, scan in particular time by built-in OSD menu
- 10 Memory store function, built-in memorizer which can store parameters of camera & functions of PTZ.
- 11 Support software Settings, address parameter Settings convenient and quick
- 12 Temperature display function, can survey the temperature inside of dome.
- 13 Communication :Rs485
- 14 Built-in multi-protocols and fully compatible with PELCO-D PELCO-P
- 15 Built-in TVS wave-proof.IP66
- 16)Size:

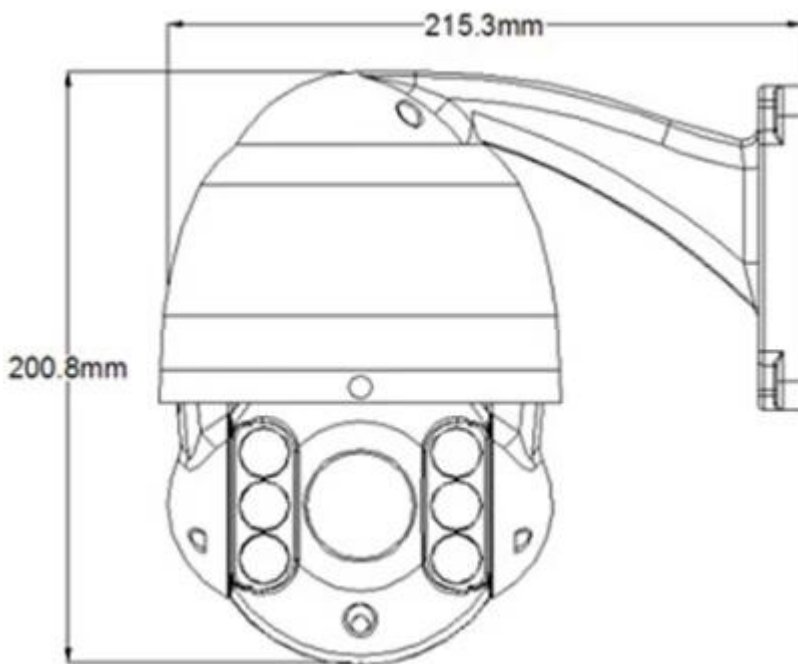

## ● SPECS

PTZ Specs	
Manual speed	Pan 0.1°~200°/s
	Tilt 0.1°~180°/s
Power supply	DC 12V
Rotation	Pan continuously 360°, tilt 0~90° with auto-flip
Preset	128 preset, title can be edited

Auto-flip	Tilt down 90°, with auto-flip 180°
Scan	355°programmable, 4 scan
Pattern	4 patterns, and each record time is not less than 180s
Tour	4 tour, and speed & park time of presets can be set.
Remote controlling	RS485
Baud rate (RS485)	2400□4800□9600/19200 bps
ID range	1-254(software add.)
Output	AHD, CVBS(Command change)
Power consumption	9W/25W(IR_LED ON)
Temperature	-10°C□+50°C
Installation	Wall installation, ceiling installation, ceiling type installation
Net weight	2.7kg
<b>Cam Spec</b>	
Sensor	1/3" Sony 238 CMOS Sensor+NVP2431H 1280×720
OPTICS	Optical x10,Zoom f = 5.1mm ~ 51mm
Angle	Appr. 55.2°(Wide) to 3.2°(Tele)
Min. Illumination	Color : 0.5 lux , BW : 0.1lux
S/N (Y signal)	52dB
White Balance	Auto
ICR	Manual/Auto
DNR	Auto / Off / Low / Middle / High
HLC	Off / On
Defog	Off / On
Max Gain	Auto
IRIS	Auto
FLIP	Vertical , Horizontal ,Vertical-Horizontal,OFF Selectable



● EXHIBITIONS

