

360 câmera escondida H100-E da ampola de Wifi da câmera VR do CCTV do grau

● FEATURES

M'TEAM

- * Adotar sensor de imagem CMOS, com alta resolução de 1.3MP, 2MP, 3MP para sua opção
- * 360 graus de ângulo de visão ampla, sem área cega, aplicável a diferentes cenários, suportando 4 diferentes modos de visualização
- * Suporte de áudio bidirecional, prompt de voz.
- * ICR infravermelho filtro de comutação automática, perceber o dia real e monitoramento noturno
- * Suporte o padrão claro, resolução HD para assistir, para se adaptar a variedade de ambiente de rede
- * Suporte a monitoramento em tempo real de telefones celulares
- * Suporte ao controle PTZ, captura remota, gravação de áudio e vídeo
- * Cobertura de rede global, a qualquer hora, em qualquer lugar suave Assista
- * Suporte móvel APP N_eye 3C

Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.



Multi-Angle Monitor

Support multi-scene modes



E PTZ



SPLIT SCREENS



ROLLER



CORRIDER

Video footage storage

Support max 128GB micro TF card for recording.



—▶ 8:30 —▶ 14:30 —▶ 20:08 —


Note: Memory cards not included in the package
please purchase separately



Intergrated with LED illumination



Show Appearance

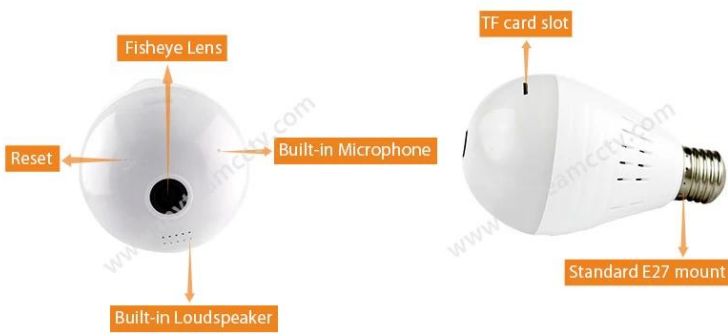

Mobile Phone View



Download the App



Scan QR code to download the APP or
Search Neye3C in APP Store/Android Market



Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc. (through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps, 11g :54Mbps, 11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

▼ Shipping
M'TEAM






Remessa: Com base nas suas demandas para escolher o melhor forma de envio.

Contate-Nos:

Se você tem alguma dúvida, bem-vindo ao [Contate-Nos](#).

Sua atenção à nossa empresa é muito apreciada.

Bem-vindo a visitar nosso site oficial www.mvteamcctv.com

Artigos relacionados sobre Wifi IP Camera:

[Como definir a detecção de movimento para a câmera IP Wifi?](#)

[Quanto tempo os registros de vídeo um cartão TF pode salvar para câmeras Wifi?](#)

[Como a visão remota MVTEAM Wifi IP Camera no computador?](#)