360 градусов скрытая камера видеонаблюдения крытый VR Wifi лампочка камера H100-E

FEATURES

* Принять CMOS датчик изображения, с высоким разрешением 1.3MP, 2MP, 3MP для вашего варианта
* 360 градусов широкий угол обзора, без слепой зоны, применимый к различным сценариям, поддержка 4 различных режимов просмотра
* Поддержка двусторонней передачи звука, голосовой подсказки.
* ICR инфракрасный фильтр автоматического переключения, осуществлять мониторинг реального дня и ночи
* Поддержка стандартного четкого разрешения HD для просмотра, для адаптации к различным сетевым средам
* Поддержка мобильных телефонов в режиме реального времени мониторинга
* Поддержка управления PTZ, удаленного захвата, аудио и видео записи
* Глобальное покрытие сети в любое время и в любом месте
* Поддержка мобильного приложения N_eye 3C

Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.

Multi-Angle Monitor

Support multi-scene modes

E PTZ

SPLIT SCREENS

ROLLER

CORRIDER

Video footage storage

Support max 128GB micro TF card for recording.

Note: Memory cards not included in the package please purchase separately

Intergrated with LED illumination

www.mvteamcctv.com

Show Appearance

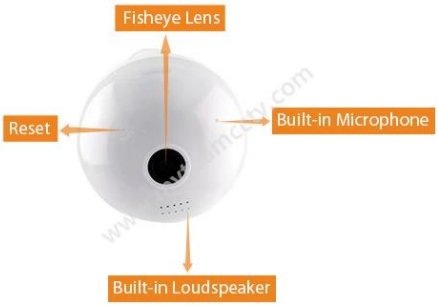

Mobile Phone View

N_eye3C

Download the App

Scan QR code to download the APP or
Search Neye3C in APP Store/Android Market

Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc.		
		(through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection,		
		video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps,11g :54Mbps,11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

Перевозка: Исходя из ваших требований, чтобы выбрать лучший способ доставки.

Связаться с нами:

Если у вас есть какие-либо вопросы, добро пожаловать в ***Связаться с нами***,

Ваше пристальное внимание к нашей компании высоко ценится.
Добро пожаловать в гости наш официальный сайт ***www.mvteamcctv.com***

Статьи по теме Wifi IP Camera:

Как настроить обнаружение движения для Wi-Fi IP-камеры?
Как долго видеокассеты может сохранять TF-карта для Wi-Fi камер?
Как удаленно просматривать MVTEAM Wifi IP Camera на компьютере?