

360 Derece Gizli CCTV Kamera Kapalı VR Wifi Ampul Kamera H100-E

● FEATURES

M'TEAM

- * Seçeneğiniz için yüksek çözünürlüklü 1.3MP, 2MP, 3MP olan CMOS görüntü sensörünü benimseyin
- * 360 Derece geniş görüş açısı, kör alan yok, farklı senaryolara uygulanabilir, 4 farklı görüntüleme modunu destekler
- * Destek iki yönlü ses, sesli komut.
- * ICR kızılötesi filtre otomatik anahtarlama, gerçek gündüz ve gece izleme gerçekleştirmek
- * Ağ ortamının çeşitliliğine uyum sağlamak için izlemek için standart net HD çözünürlük desteği
- * Destek cep telefonları gerçek zamanlı izleme
- * Destek PTZ kontrolü, uzaktan yakalama, ses ve video kaydı
- * Küresel ağ kapsama, her zaman, her yerde pürüzsüz
- * Destek mobil APP N_eye 3C

Easy installation, Screw it easily

Led bulb shape, standard E27 base, AC 220V voltage.



Multi-Angle Monitor


Support multi-scene modes



E PTZ



SPLIT SCREENS

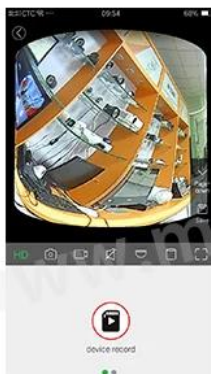

ROLLER



CORRIDER

Video footage storage

Support max 128GB micro TF card for recording.



—▶ 8:30 —▶ 14:30 —▶ 20:08 —


Note: Memory cards not included in the package
please purchase separately



Intergrated with LED illumination



| Show Appearance |

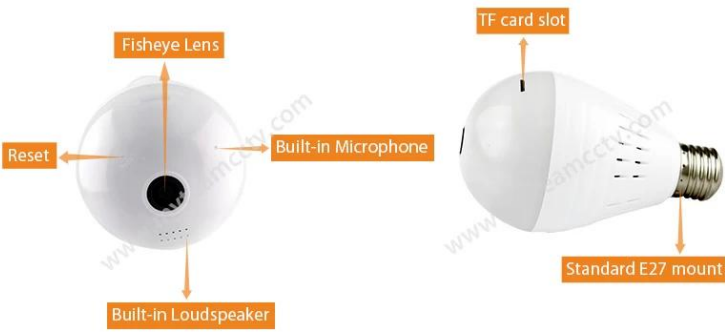

Mobile Phone View



Download the App



Scan QR code to download the APP or
Search Neye3C in APP Store/Android Market



Model No.		H100-E6	H100-E8	H100-E9
Camera	Resolution	1.3MP	2.0MP	3.0MP
	Minimum illumination	0.02Lux @(F2.0,AGC ON) ,0 Lux with IR		
	Shutter	Shutter adaptation		
	Camera lens	360 degree fisheye lens		
	Lens interface type	M12		
	Day and night conversion	ICR infrared filter		
	Digital noise reduction	3D digital noise reduction		
Compression	Video compression standa	H.264		
	Coding type	H.264 Main Profile		
	Video compression rate	HD, SD, rate adaptation.		
	Audio compression standa	AAC		
	Audio compression rate	Rate adaptation		
	Frame rate	Max:25fps network transmission rate: adaptive adjustment		
	Image setting	Brightness, contrast, saturation, etc. (through the client to adjust the setting)		
Network	Storage function	Support Micro SD card (max 128G)		
Function	Intelligent alarm	Video is lost, the network is disconnected, and the power is disconnected.		
	General functions	Reverse, capture, mobile alarm, password protection, video playback, remote control, two-way intercom		
Wireless	Wireless standard	IEEE802.11b, 802.11g, 802.11n Draft		
Parameter	frequency range	2.4 GHz ~ 2.4835 GHz		
	Channel bandwidth	Support 20/40MHz		
	security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS		
	transmission speed	11b: 11Mbps, 11g :54Mbps, 11n :135Mbps		
General specification	temperature and humidity	-		
	Power	AC 110V~220V		
	Power consumption	3W MAX		
	Infrared radiation distance	MAX 5meter		
	Size(mm)	87mm x 87mm x 127mm		
	Weight	200g		

▼ Shipping
M'TEAM






Nakliye: Taleplerinizi göre seçmek için en iyi nakliye yolu.

Bizimle iletişime geçin:

Herhangi bir sorunuz varsa, hoş geldiniz [Bizimle iletişime geçin](#).

Firmamıza olan yakın ilgi çok takdir edilmektedir.
Ziyaret etmenizi bekliyoruz resmi web sitemiz www.mvteamcctv.com

Wifi IP Kamera ile İlgili Makaleler:

[Wifi IP Kamera için Hareket Algılama Nasıl Ayarlanır?](#)

[Bir TF Kart Wifi Kameralar İçin Ne Kadar Tasarruf Edebilir?](#)

[Bilgisayarda MVTEAM Wifi IP Kamera uzaktan nasıl yapılır?](#)