
Features

M'TEAM





Adjustable DVR menu transparency

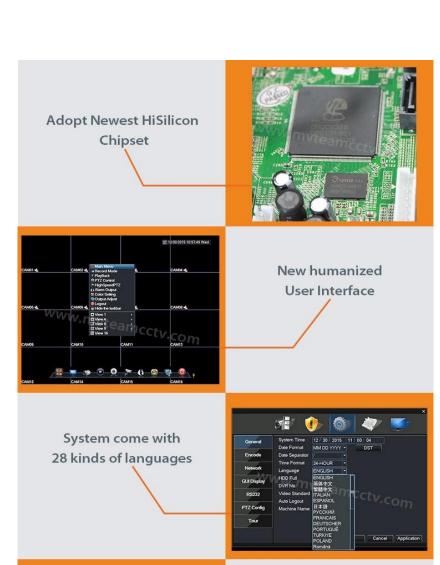





Support playback different time period video records in one screen, save time on find useful video records







DVR menu with Ping command, convenient to do DVR network testing

With UTC Function, control analog camera and PTZ camera on DVR thru coaxial cable





Support P2P remote view by CMS and IE browser

Come with cloud ID,easy to realize P2P remote view by scan the QR Codes





Support remote view, record, playback, receive motion detection alarm by Iphone and Andriod Smartphone

Sepcifications



- 1.AHD\TVI\CVI:8CH 1080P@15fps recording, 4CH 1080P playback;
- 2.AHD\TVI\CVI:8CH 1080N@25fps recording, 8CH 1080N playback;
- 3.HVR 1:4CH 1080P@25fps Analog + 4CH 1080P@25fps IP recording, 2CH 1080P@25fps playbackp;
- 4.HVR 2:4CH 1080N@25fps Analog + 4CH 1080P@25fps IP recording, 2CH 1080P@25fps playbackp;
- 5.NVR:8CH 1080P@25fps IP recording, 4CH 1080P@25fps playback;
- 4-Audio: 4ch input
- 5-Alarm:4ch input,1ch output
- 6-Support digital zoom,P2P remote view

| Model | | 6408H80P |
|-------------------------|-------------------|---|
| Compression | | H.264 Standard compression |
| Operation | | Embedded Linux |
| Image coding-control | | lmage edit adjustable,both changable and fix stream optional |
| Dual stream | | Can be set up in each channel |
| Monitor image quality | | 1080P 1920*1080 |
| Image dynamic detection | | Multiple detection areas in each channel |
| Video framerate | | AHD\TVI\CVI:8CH 1080P@15fps recording;NVR:8CH 1080P@25fps IP recording |
| lmage playback quality | | AHD,TVI,CVI:1080P@15 playback ; NVR:4CH 1080P@25fps playback |
| Video mode | | Support manual, automatic, dynamic monitoring, alarm trigger video mode |
| Backup mode | | U disk, USB portable disk, USB burn, Network storage and backup |
| Operate mode | | Mouse, remote controller, front panel |
| login locally | | without password |
| Save recording | | local hard disk and network |
| External interface | Video input | 1080P 15FPS AHD,TVI,CVI,CVBS;1080P 25FPS NVR |
| | Audio input | 4*RCA |
| | Network interface | 10M/100M base-T Ethernet (RJ-45) |
| | USB connect port | 2*USB 2.0 |
| | RS485 | RS485*1 |
| | Alarm input | 4CH |
| | Alarm output | 1CH |
| | Internal HDD | 2 SATA HDD port |
| | Maximum capacity | Maximum 4TB each SATA□ |
| Cell phone monitoring | | Support Window Mobile, iPhone,iPad, Android |
| Power | | 12V/3A |
| DVR size | | 340(L)*265(W)*70(H)mm |
| L | | |

PRODUCT PICTURE







The DVRs don't come with hard disk. If you need buy hard disk from us, we could install hard disk into DVR.

2)How to increase recording time?

a.Install more hard disks

b.set the dvr to motion detection record

c.reduce the recording resolution and frame rate

3)Does the DVR support P2P?

Yes, the dvr come with cloud id, support P2P remote view on mobile phone and computer.

4) what's the mobile phone view app of the dvr?

The mobile phone app is "Topsview"

5) What's the resolution of your dvrs?

720P, 1080N (1080H), 1080P optional

6) For Hybrid 5-in-1 DVRs, how to switch the modes?

Right click mouse, there is channel type option, click channel type can open the switch mode menu as below:



7) How many camera types can be connected at the same time on 5-in-1 hybrid dvr?

It supports 5 modes AHD,CVI,TVI,CVBS, IP at the same time.

Switch the dvr to part digital channels and part analog channels.

Digital channels for IP cameras, analog channels for AHD, TVI, CVBS and CVI.

For analog channels you can switch the AHD,TVI,CVBS and CVI singal at will in below menu:



8)How to correctly turn off DVR?

First, turn off in DVR menu, and then cut off the power. Do not cut off the power directly, DVR may be damaged due to misuse.

9)How to recover DVR password?

We could provide application "GenSuperPassword", you can use the application to recover password.

The DVRs don't come with hard disk. If you need buy hard disk from us,we could install hard disk into DVR.

10) Does your NVR support ONVIF IP camera?

We suggest you make a test sample, NVR support ONVIF, but IP camera and NVR from different factory are not compatible.

11)Does NVR support POE?

At present, our NVR don't support POE.

More FAQs about DVRs, please check at: DVR FAQs











Contact us:

If you have any question, welcome to contact us.

Your close attention to our company is highly appreciated.

Welcome to visit our official website www.mvteamcctv.com to view wideo demos,download product catalog and read CCTV technical articles.